

# One Stop Solution (Project ,Sales,Service,Spare parts)



Hot Kitchen Equipment



Cold Kitchen Equipment



Food Process Equipment



# About Us

Heat Kitchen Equipment is a Malaysia Based Food Service Equipment Distributor and Supply Company Established in 2017 ,15 year Experience in this industrial. We Specialised in Quantity Kitchen and bar Equipment and Stainless Steel Design and Fabrication ,Project Management and implementation ,Consider a 4S company,SALES ,SERVICE,SPARE PART and SUPPORT . medium and high range.

Our Target is Supply the suitable kitchen and bar Equipment to our Clients and Propose new Technologies Kitchen Equipment for Ours Client to Solve the operation Problem and Man power cost save solution ,Cost Reducer and Business Expanding Solution for Chain Store ,QSR, back up support service support is our goal.

We provide kitchen Design build and set up for Restaurant ,Cafe ,food court ,Hotel,Beverage bar ,central kitchen

Food service Consultation ,Kitchen solution ,Smart Kitchen Work Flow Consult,Kitchen equipment preventing maintainance






# Partner Brand



# Table Of Contents


## 1.HOT KITCHEN

- Induction Cooker .....	7
- Fryer .....	8
- Powerline .....	9-14
- Fryer .....	15
- Microwave & Convection & Combi Oven .....	16-17
-Sous Vide Cooker .....	18
-Electric Griddle .....	19
-Tournus Equipement.....	20
-Panini Griddle.....	21
-MenuMaster Microwave Oven.....	22
-Rice Cooker/ Rice Warmer.....	23
-Salamander.....	24
- Dim Sum Steamer .....	25
- Heated Well & Noodle Station .....	26
- Merrychef .....	27
- Food Warmer & Display Food Warmer.....	28
-Convotherm .....	29-31
-Crystal.....	32

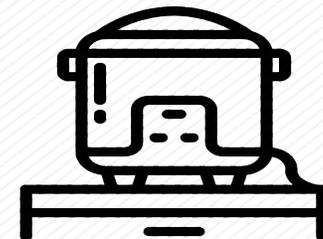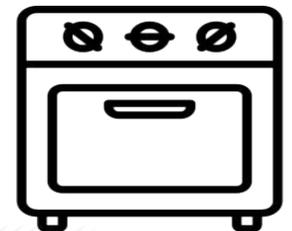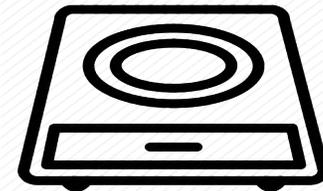

## 2.COLD KITCHEN

- Snow.....	34-39
- LVNI .....	40-61

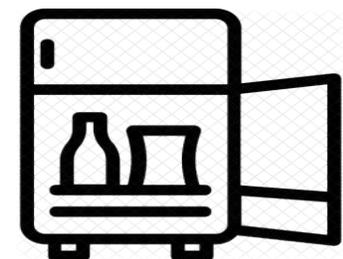

## 3.MILK TEA & BAR EQUIPMENT

- Heat Cup sealer, Milk steamer boiler, Fructose.....	63
- AQUARMOR.....	64
-Coffee Machine.....	65
-Everpure.....	66
-Soda Maker and Heat Can Bottle Sealer.....	67
-Water Boiler.....	68
-Vitamix.....	69
-Tea Brewer.....	70-71



# Table Of Content

## 4.FOOD PROCESSING

- Meat Slicer & Mincer..... 73
- Bone Saw & Dough Mixer ..... 74
- Mixer Stick..... 75
- Food Processor Machine ..... 76
- Garlic Silcer / Scallion Silcer / meat tenderizer Machine 77-78

## 5.DESSERT AND SNACKS



- Ice Cream Machine & Yogurt Maker Machine..... 80
- Spaceman.....81-84

## 7.SHORT TERM LEASING

- Ice Cream Maker Machine .....86
- Dishwasher..... 87

## 8.OTHERS

- Project.....88
- Stainless Steel Design.....89

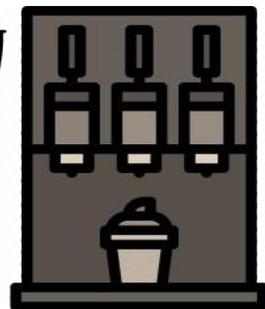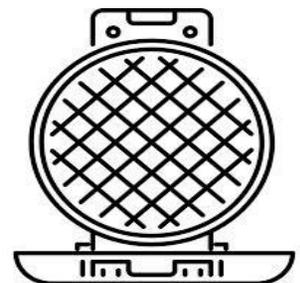

# **HOT KITCHEN**




## HAUSCOOK IH COOKER

- Dimensions : 490L x 230W x 410H mm
- Power Supply : 220 V - AC 50 / 60 Hz / 1 / 25 amps
- Rated Power : 1.7 Kw
- Tank Capacity : 1.5 Liter
- Weight : 4.5 Kg
- Heating Type : Hot Water Tank Type
- Cooking Type : Available for cooking both general and instant
- Connecting Water : Apart from running water, water pail can be used as pump
- Filtration feature : Filtered water can be used by installation of water filter

### Benefits

- The time for cooking can be reduced because of its high thermal efficiency.
- Consumption of electricity is reduced (cost-saving).
- Users are safe from the risk of fire or skin burns.
- It is eco-friendly because it does not emit harmful gases.

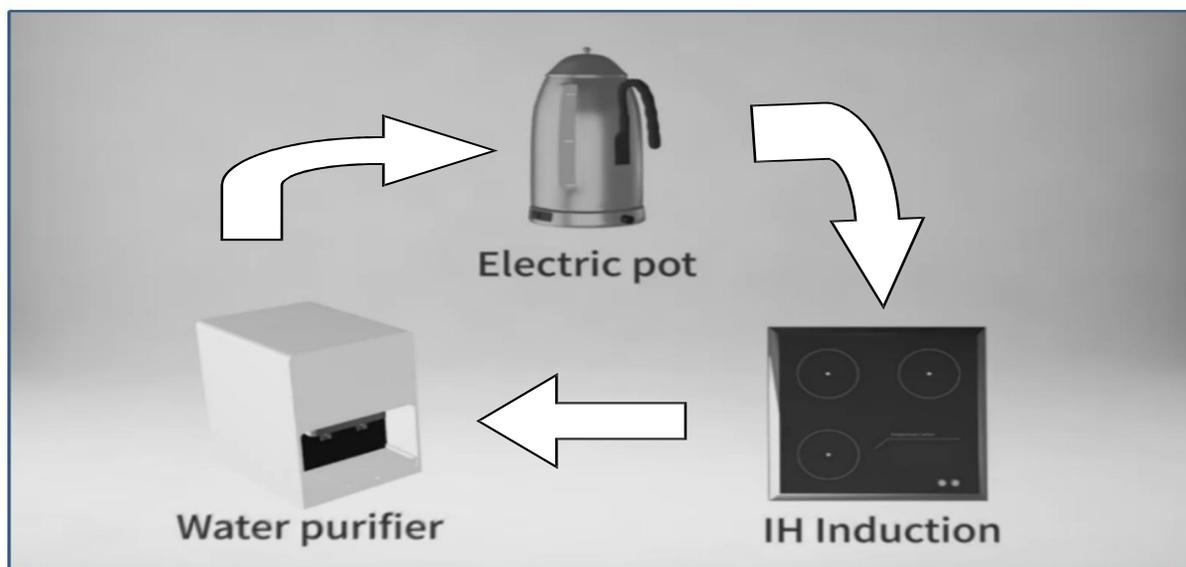

The machine which come with build in water filter and hot water tank ,auto refill ,3 memory to set time and dispenser water level ,cook and dispenser water same time ,for a korean noodle cooking time 3.5 minute ,water temperature are 85c .



SR114E (Electric)

F-4P (Gas)


LP46 (Electric)

Model	SR114E (Electric)	F-4P (Gas)	LP46 (Electric)
Machine dimension (L x W x H mm)	691x400x1120	770x395x1352	762x513x1270
Oil Capacity (Liter)	20	25	31
Power (Kw)	14	-	10500
Total BTU	-	80,000	-
Net Weight (Kg)	82	183	75
Burner	-	4	-

## 24" GAS GRIDDLE

### PBT24-0-24G-A

- 2 x 30,000 BTU U style burner
- 0.75" thickness griddle plate
- 2 independent gas valve control
- Zinc alloy material knobs
- 4" adjustable stainless steel feet
- 1 pull-out waste tray
- All stainless steel construction
- 3/4" rear gas connection
- Include conversion orifices
- ETL&NSF approval

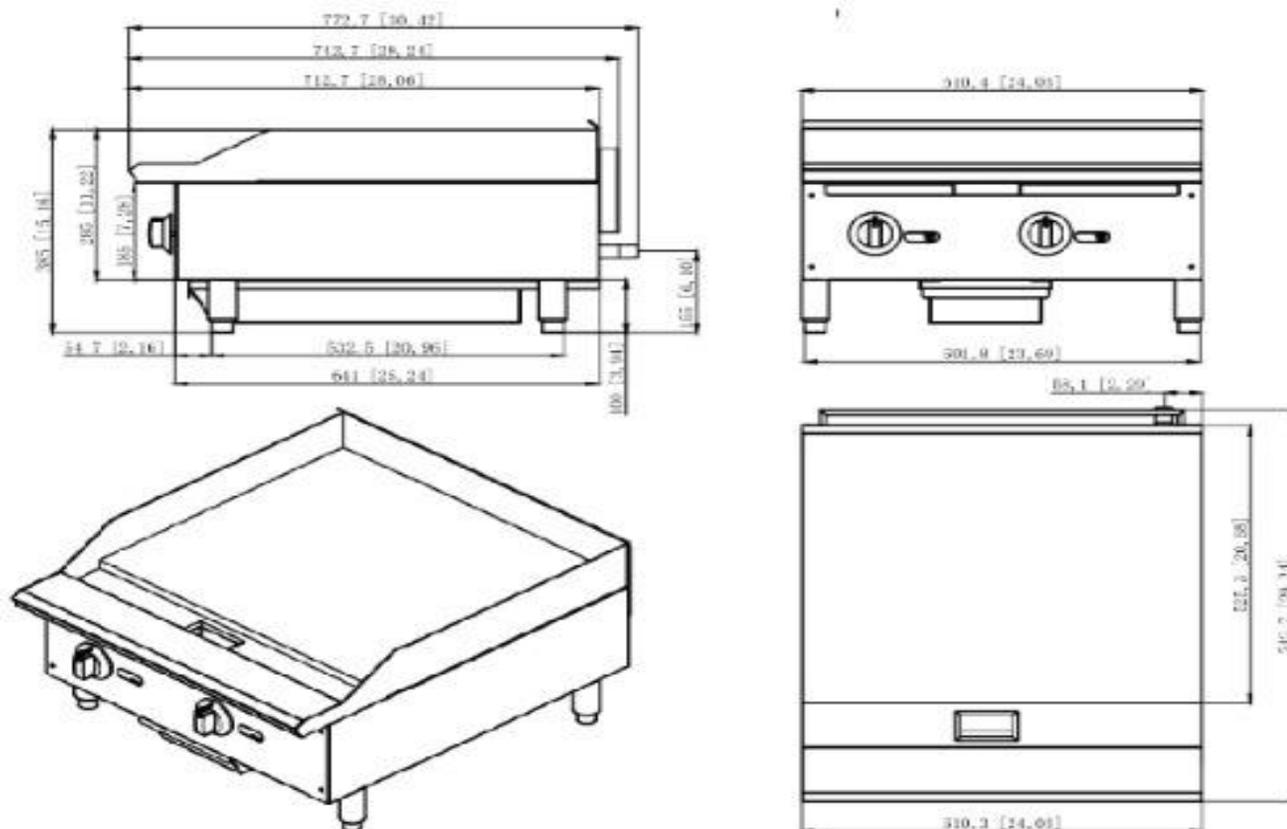

#### POWERLINE EQUIPMENT COMPANY


Pulaski Street, Norwalk, CT 06851 USA. Tel: 203-847 2357 Fax: 203-847 6480

[www.powerlineequip.com](http://www.powerlineequip.com)



## 6 BURNER 36" COUNTERTOP RANGE PBT36-6-A

- 6 x 25,000 BTU manually controlled burner
- Heavy duty cast iron & removable grate
- 6 independent gas valve control
- Zinc alloy material knobs
- 4" adjustable stainless steel feet
- 1 pull-out waste tray
- All stainless steel construction
- 3/4" rear gas connection
- Include conversion orifice kit
- ETL&NSF approval

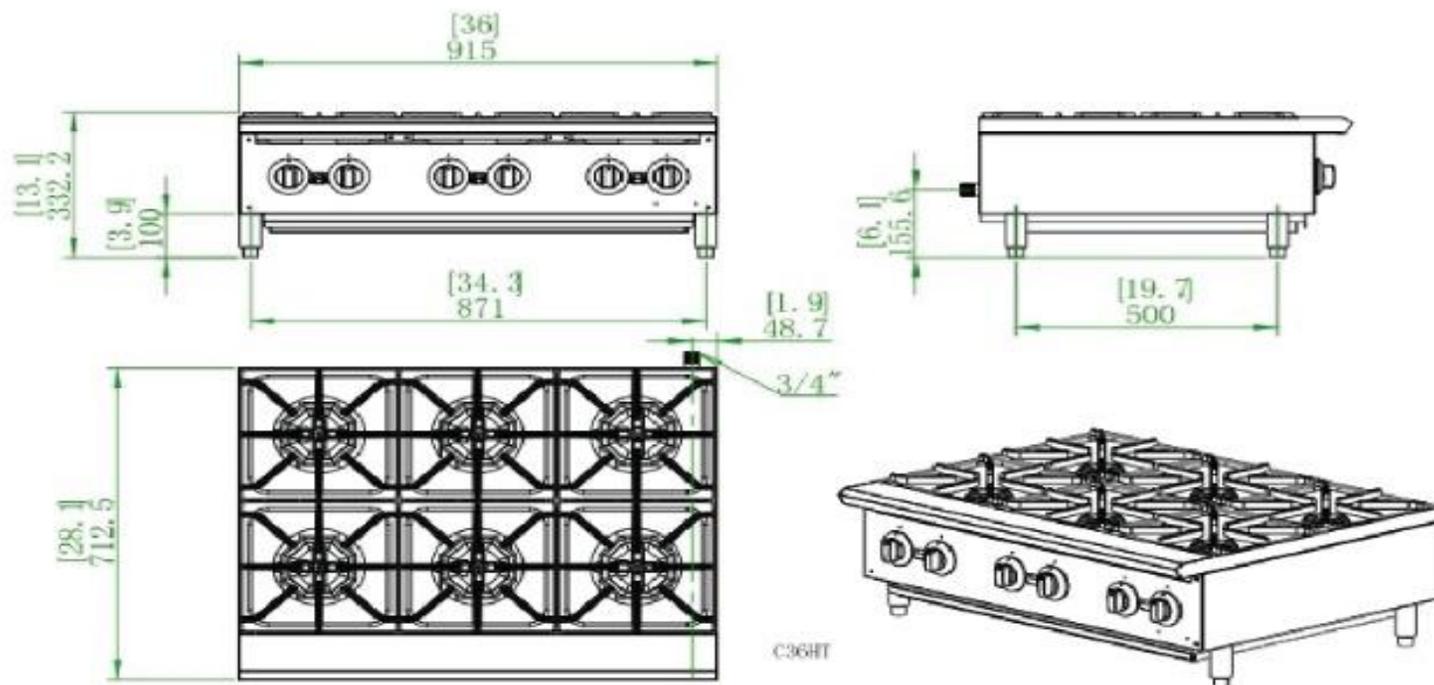

### POWERLINE EQUIPMENT COMPANY

Pulaski Street, Norwalk, CT 06851 USA. Tel: 203-847 2357 Fax: 203-847 6480




[www.powerlineequip.com](http://www.powerlineequip.com)



## 4 BURNER 24" RANGE WITH STANDARD OVEN

### PBR24-4-A

- 4 x 30,000 BTU open top burners
- 30,000 BTU standard oven
- 12" x 12" heavy-duty cast iron grates
- 4 3/4" deep back shelf and 2" front ledge
- 6" adjustable stainless steel legs
- 2 nickel-plated metal oven racks and 4 positions
- 3/4" gas inlet pipe
- 1 pulled-out crumb tray
- Rugged stainless steel front and aluminium sides
- Zinc alloy material knobs
- 250-550 degrees Fahrenheit for oven temperature
- Chamber interior size: 20 5/8" W x 25 7/8" D x 13 7/8" H
- ETL&NSF approval

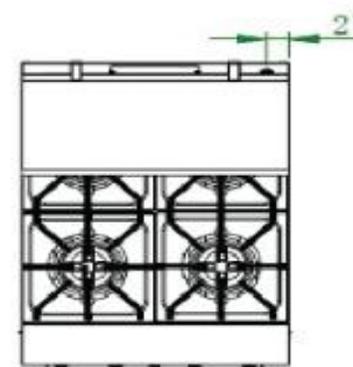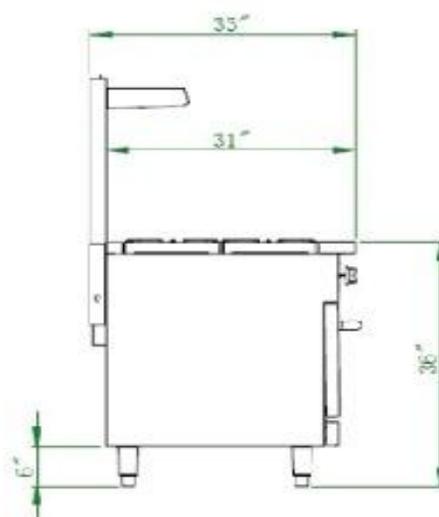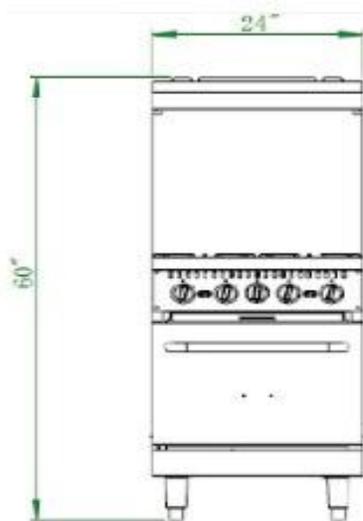

#### POWERLINE EQUIPMENT COMPANY


Pulaski Street, Norwalk, CT 06851 USA. Tel: 203-847 2357 Fax: 203-847 6480

[www.powerlineequip.com](http://www.powerlineequip.com)



## 4 BURNER 24" COUNTERTOP RANGE PBT24-4-A

- 4 x 25,000 BTU manually controlled burner
- Heavy duty cast iron & removable grate
- 4 independent gas valve control
- Zinc alloy material knobs
- 4" adjustable stainless steel feet
- 1 pull-out waste tray
- All stainless steel construction
- 3/4" rear gas connection
- Include conversion orifice kit
- ETL&NSF approval

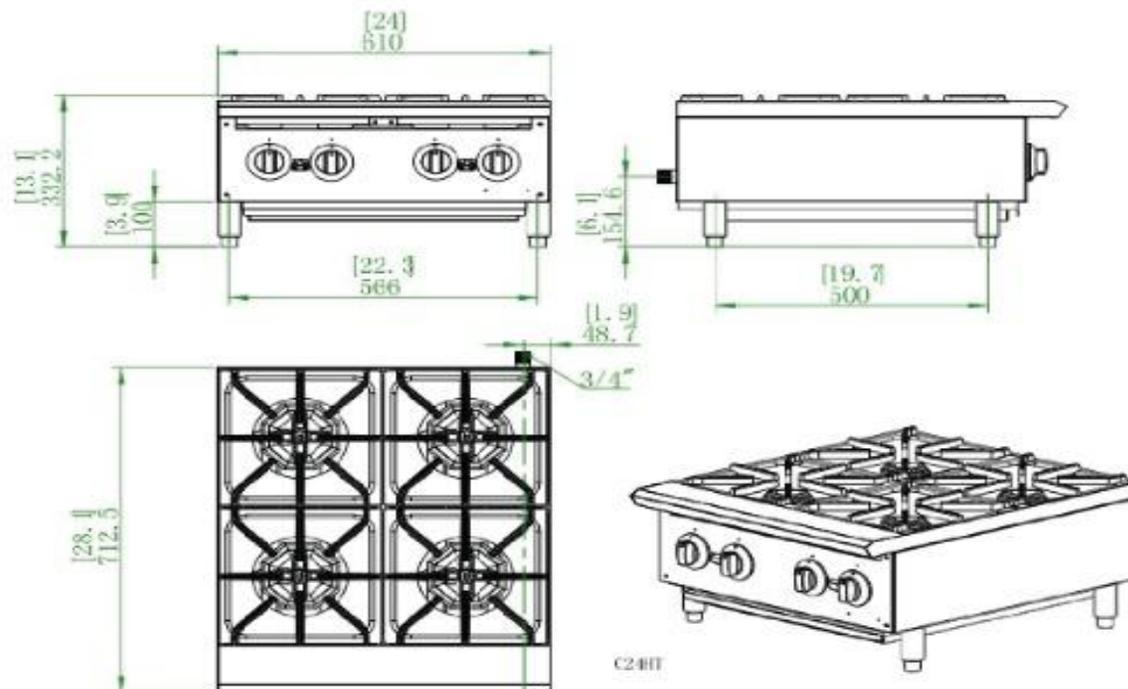

### POWERLINE EQUIPMENT COMPANY

Pulaski Street, Norwalk, CT 06851 USA. Tel: 203-847 2357 Fax: 203-847 6480



[www.powerlineequip.com](http://www.powerlineequip.com)



## COUNTER-TOP CHARBOILER WITH LAVA ROCK

### PBB24-A

- Made of high-quality stainless steel, this product is corrosion resistant, rustproof and permits easy removal of cooking fumes.
- The one stretch forming worktop is tough, tenacious and simple. It is also smooth and flat so that it will not collect dirt and can be completely cleaned.
- With an efficient heating tube, this product is energy-saving and efficient and ensures safety and convenience. Free temperature setting is available. \*Users can adjust the cooking temperature as they want to meet the temperature requirements for cooking different food.
- The oil basin can collect the oil conveniently to keep it clean and efficient.

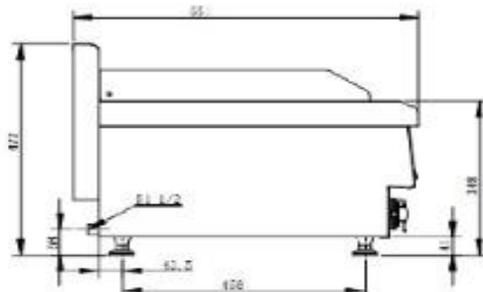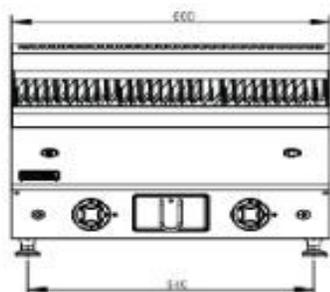

Model		PBB24-A
Dimension (mm)		600 x 650 x 475
Height of Working Table (mm)		335
LPG	Pressure (Pa)	2800
	Power (kW)	14.4
	Gas Cons. (kg/h)	1.2
NG	Pressure (Pa)	2000
	Power (kW)	14.4
	Gas Cons. (m <sup>3</sup> /h)	1.52
Temperature (°C)		120-200
Gas Inlet Size		R 1/2"
Weight (kg)		67

#### POWERLINE EQUIPMENT COMPANY




Pulaski Street, Norwalk, CT 06851 USA. Tel: 203-847 2357 Fax: 203-847 6480

[www.powerlineequip.com](http://www.powerlineequip.com)



## 6 BURNER 36" RANGE WITH STANDARD OVEN PBR36-6-A

- 6 x 30,000 BTU open top burners
- 30,000 BTU standard oven
- 12" x 12" heavy-duty cast iron grates
- 4 3/4" deep back shelf and 2" front ledge
- 6" adjustable stainless steel legs
- 2 nickel-plated metal oven racks and 4 positions
- 3/4" gas inlet pipe
- 1 pulled-out crumb tray
- Rugged stainless steel front and aluminium sides
- Zinc alloy material knobs
- 250-550 degrees Fahrenheit for oven temperature
- Chamber interior size: 26 7/8" W x 25 7/8" D x 13 7/8" H
- ETL&NSF approval

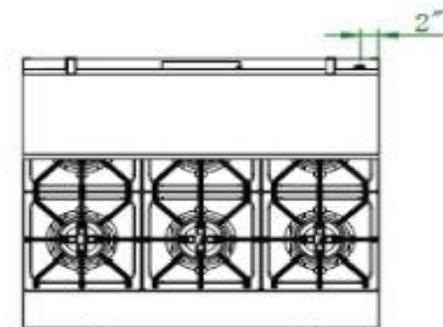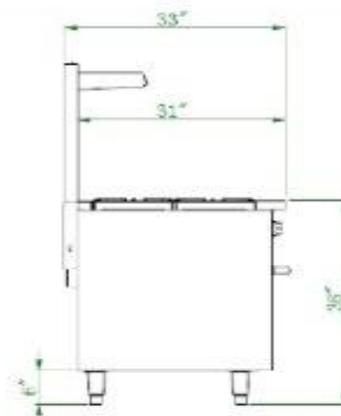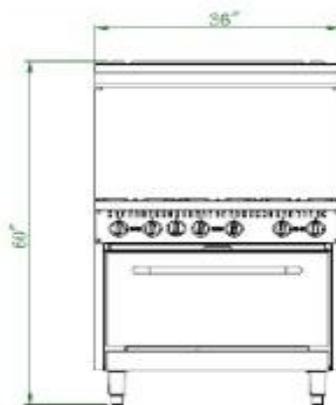

### POWERLINE EQUIPMENT COMPANY

Pulaski Street, Norwalk, CT 06851 USA. Tel: 203-847 2357 Fax: 203-847 6480

[www.powerlineequip.com](http://www.powerlineequip.com)



RF8DS



FD80DR

Model	Power	Outside Dimensions	Basket Dimensions	Volume	Output (French fries)	Weight	Volts
RF8DS	2 x 3,4K w	570 x 400 x 270mm	2 x (220x250x100mm)	2 x 8 L	24Kg/h	12Kg	2 x 230 V
FD80DR	2 x 3,4Kw	590 x 450 x 370mm	2 x (220x260x100mm)	2 x 8 L	24Kg/h	15Kg	2 x 230 V

MARCHEF  
MODEL:EF-101V



- **Dimensions :**  
470x280x325mm
- **Voltage :** 220v-240v/50Hz
- **Power :** 3Kw
- **Capacity :** 10Liter
- **Stainless steel construction –**  
**Micro safety switch**
- **Safety over temperature cut out**
- **Insulated basket handle**
- **Easily removable electric box**
- **Maximum & Minimum Oil Lever Mark**
- **Precise thermostat control**



## CHEFTOP MIND.Maps™ PLUS COUNTERTOP

### Combi oven 5 GN 1/1

Oven model: **XEVC-0511-EPRM**

Tray pitch: 67 mm

Voltage: 380-415V3N~

| 220-240V3~ | 9,3 kW

Dimensions - w x d x h: 750 x 783 x  
675 mm

Weight: 70 kg

Opening type: Hinge on the left side



## CHEFTOP MIND.Maps™ PLUS COUNTERTOP

### Combi oven 3 GN 1/1

Oven model: **XEVC-0311-EPRM**

Tray pitch: 67 mm

Voltage: 380-415V 3N~ | 220-240V 3~ | 220-240V 1N~/5KW

Dimensions: 750 x 783 x 538 mm

Weight: 56 kg

Opening type: Hinge on the left side





## **UNOX LINEMISS CONVECTION OVEN**

**MODEL:XFT-133**

Pitch:75 mm

Frequency:50 / 60 Hz

Voltage:230V 1N~

Electrical power:3 kW

Dimensions WxDxH (mm)

600x655x509

Weight:31 kg

**Humidity:YES**



## **UNOX LINEMISS CONVECTION OVEN MODEL:XF-023**

Pitch:75 mm


Frequency:50 / 60 Hz

Voltage:230V 1N~

Electrical power:3 kW

Dimensions: WxDxH( mm):600x587x472MM


Weight:22 kg

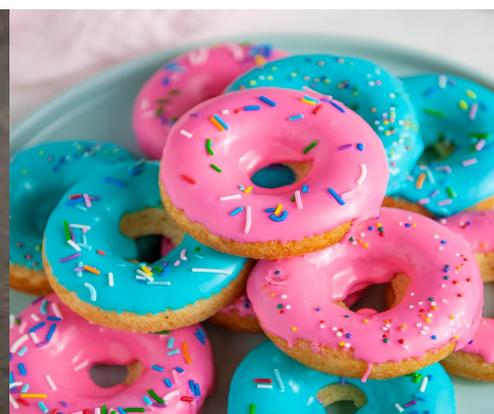



- Powerful circulation pump with removable filter to ensure uniform temperature distribution .
- Submersible parts made from Stainless Steel for durability and ease of cleaning .
- Electronic temperature control with large easy to read digital display showing time, set

**SPECIFICATIONS**  
 Power : 1.5Kw Voltage : 230V  
 - 50 Hz  
 Dimensions : 140 x 320 x 130 mm Weight :  
 1.9kg

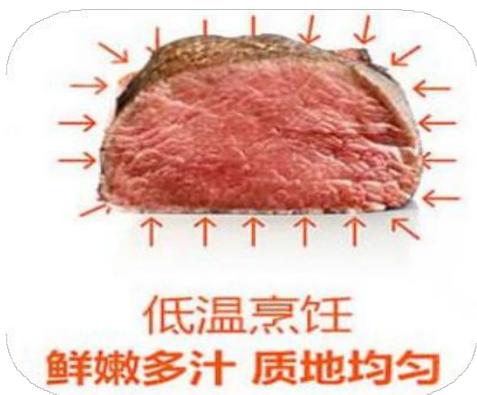

**SPECIFICATIONS**  
 Standard Power : 800 Watts Voltage :  
 220V - 240V / 50 Hz Dimensions :  
 60 x 385 mm



## ROLLER GRILL ELECTRIC GRIDDLE

- Outside Dimensions : 900x475x230mm
- Cooking surface : 900x400mm
- Cooking area : 3
- Power : 3 x 3 kW (3 Cords)
- Volts : 380 V
- Weight : 44Kg



## ROLLER GRILL ELECTRIC GRIDDLE

- Outside Dimensions : 600x475x230mm
- Cooking surface : 600x400mm
- Cooking area : 2
- Power : 6.4Kw
- Weight : 32Kg



## HEAT ELECTRIC GRIDDLE

- Outside Dimensions : 650x580x340mm
- Cooking surface : full flat
- Cooking area : 2
- Power : 5Kw
- Volts : 220-240 V
- Weight : 34Kg





## STERILIZING CABINETS

**PRINCIPLE:** bacterial sterilizing by UV-C radiation.

Food quality stainless steel construction.

Vertical radiused edges.


Top and sloping inside.

Transparent plexiglass door thickness 5 mm radiused with magnetic closing.

Knives standing up with blade at the top and handle leant down.

Adjustable timer from 0 to 2 hours.

**SAFETY:** radiation interruption system when door is opened (the timer keeps on activity).

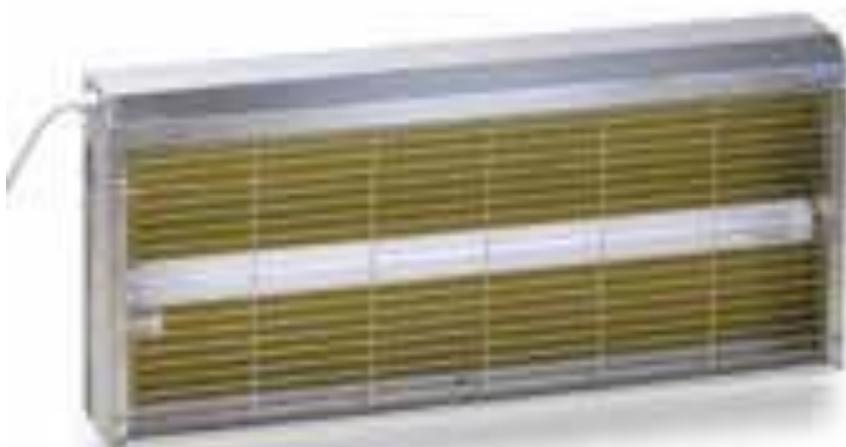

**TOURNUS  
EQUIPEMENT**

## HYGIENE

Adhesive insect-killers operate silently, without causing sparks, insect explosions or projections. The adhesive boards are odour-free and last an average of 4 weeks in summer, depending on insect numbers.

## WIDE CHOICE

Tournus offers 7 models from 15 to 80 W to ensure optimum protection in rooms from 40 to 180 m<sup>2</sup>. The insect killers come in suspended or wall-mounted versions, both for the electrical or the adhesive type.



### WARING STYLE PANINI GRILLS

- Model : WPG 150
- Dimensions : 240 x 290 x 390mm
- Electrical : 120 Volt, 15A
- Ribbed cast - iron plates
- Brushed stainless steel body and removable drip tray
- Hinged, auto balancing top plate to suit foods up to 3" thick
- Adjustable thermostat to 300°C
- Power and ready indicator lights
- Heat - resistant handles

### ANVIL CONTACT GRILL - PANINI SINGLE- Model : PGT0001

- Dimensions : 410 x 378 x 205 mm
- Power : 2.6kW
- Voltage : 230V
- Weight : 20.5kg

### FEATURES

- Thermostatically controlled between 50°C - 300°C
- Heavy duty cast iron plates
- Self balancing upper grill plate
- Removable fat tray





**MEDIUM DUTY  
MICROWAVE OVEN 1100W  
RCS511TS**

- Dimensions :  
483Dx559Wx352H mm
- Power Supply : 230V / 50 Hz, 13 A  
single phase
- Frequency : 2450 MHz, 1100 watts of  
cooking power.



**HEAVY DUTY  
MICROWAVE OVEN  
1800W  
DEC18MU**

- Dimensions :574D x 419W x 343H mm
- Power Supply : 230 V / 50 Hz,13 A single  
phase
- Power Output : 1900 W
- Power Consumption : 2900 W, 12.6 A ,



**MENUMASTER XpressChef™ 3i Series  
Speed Oven**

- Dimensions : 743D x 358W x 578H
- 4000 or 5000 watts of power
- Temperature Range : 95° - 270°C (200° - 520°F)
- Exterior Finish : Stainless steel and Painted Steel
- Power Level : 11
- 2 Magnetron : 61kg / 1 Magnetron : 53kg

**MENUMASTER®  
Commercial**



## WISE COMMERCIAL RICE COOKER/WARMER

Product Name

**Electronic Rice Cooker / Warmer**

Model:CFXB138-195XG-A

Dimensions (W x D x H):455 x 390 x 340(mm)

Power:110V / 220V 1.95KW

Capacity:13L

Temp.Range:50-150°C

**60**  
Cup  
(14 Liter)



## RINNAI 10 LT GAS RICE COOKER

### SPECIFICATIONS


Gas Connection	9.5
Gas Consumption (LPG)	7.95
Product Weight (Kg)	15
Product Size (WxH)mm	531 x 420



**DESIGNED FOR  
YOUR OWN TASTE**

## RINNAI GAS SALAMANDER-6 BURNERS

Model	RGP-46A
Dimensions (LxWxH) mm	978 x 400 x 602
Weight (Kg)	35
Gas Connection	9.5
Type of Gas	Please Ijdicate LP Gas or Natural Gas

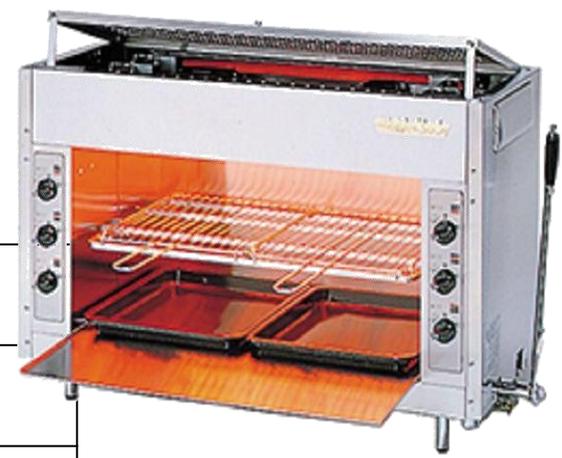

This compact yet powerful snacking grill is perfect for toasting, grilling and re-heating sandwiches and snacks of all kinds, including Pizza, Croque-Monsieur, Quiches and toasts. Heating from top and bottom the BAR1000 is a high speed toaster or it can be used as a traditional salamander by just using the top elements. With a heat up time of 30

seconds the BAR1000 is an efficient cooking platform and the radiant infrared technology keeps

### ROLLER GRILL BAR1000

Weight	10Kg
Dimensions (mm)	450 x 285 x 305
Element Type	Quartz / Infrared
Power	2 Kw
Shelf Area	350 x 250



4HS  
2

RCTHW-6  
W/Steamer Plate  
Adapter

4HS

Model	Power	Outside Dimensions	Weight	Volts
<b>RCTHW-6</b>	6 Kw	610 x 368 x 282mm	14Kg	220 V /50/1
<b>4HS2</b>	4Kw	475 x 475 x 130mm	9Kg	220 V /50/1
<b>4HS</b>	4Kw	475 x 475 x 130mm	9Kg	220 V /50/1



**-MODEL : RCTHW-6 w/Soup Kettle Adapter And Two 7 Liter Soup Pans w/Lids**

- Dimension :  
368Wx610Dx282Hmm

- Voltage : 220/50Hz/Single Phase

**-MODEL : RCTHW-6 w/Sauce Kettle Adapter And Three 4 Liter Sauce Pans w/Lids**

- Dimension :  
368Wx610Dx282Hmm

- Voltage : 220/50Hz/Single Phase

**- MODEL: RHW-2**

- INCLUDES TWO WELLS WITH 10 LITER POTS AND HINGED LIDS

- Dimension:  
630Wx330Dx355Hmm

-Volatage : 230Vols/50Hz/Single Phase



**- MODEL : RCTHW-6 w/ Standard Pasta Cooker Adapter And Optional Stainless Steel Noodle Ladles**

- Dimension :  
368Wx610Dx282Hmm

- Voltage : 220/50Hz/Single Phase



**Lestov**

**Commercial Induction Hob  
Manufacturer**

- ★ 18 years of manufacturing experience
- ★ Full range of catering equipment
- ★ Independent R&D/design/production
- ★ Customized OEM+ODM



**Lestov**



EQUIPMENT/QUICK SERVING RESTAURANT



# MERRYCHEF<sup>®</sup>

*A Welbilt Brand*



## MerryChef Eikon e1s

- Dimensions: 407x538x588mm
- Voltage : 230V/50Hz/1Ph
- Weight : 60.7Kg

Accessories :

- 1 Solid Cook Plate
- 1 Paddle with hand-guard & supporting side walls
- 1 Non-Stick cook Plate Liners



## MerryChef Eikon e2s Classic SP

- Dimensions: 356x595x620mm

- Voltage : 230V/50Hz/1Ph

- Power : 3.12kW
- Weight : 60.7Kg

Accessories :

- 1 Flat Cook Plate
- 1 Paddle with hand-guard & supporting side walls
- 1 Quarter size GN dish
- 2 Cook Plate Liners





## WISE PAU STEAMER MACHINE (U-SHAPE)

### 4 SPECIAL 4 FEATURES

- A. Special designed indicator light to prevent heater from dry heating without water filling.
- B. Heating indicator light helps monitor internal temperature.
- C. German EGO thermostat controls temperature
- D. Special designed heating device to enable the heating time adjustable



## Wise curve Glass Warmer showcase

model: WHS-590C

Dimension: 590x420x726mm

Capacity: 113L

Power: 220v/50hz/800w/13amps

Temp: 85~99

**WISE®**



# Standing Electric Fryer



WEL-1L



WEL-2L



WEL-3L

## FEATURES

- Digital control system with one-button-pressing for automatic frying operation.
- Each tank is able to set 6 different kinds of food's timing from its respective channel and can work simultaneously.
- Easy frying by independent control panel with 12-channel timer.
- Built-in overheat protection device for safety. When oil temperature exceeds the set temperature, the power will be cut off. (Manual restoration).
- Easy cleaning with lift-up heating element.
- Use "all-in-one-button" frying operation program, frying basket will lift up automatically. This function is especially efficient for user during rush hours to avoid improper frying time. ( For the fryer with auto lift-up system only)

## Detail Description



12 pre-set cooking program



U-shape stainless steel heat exchanger tube



Automatic basket lift up



Filtration

Product Name	28L Electric Standing Fryer	56L Electric Standing Fryer	84L Electric Standing Fryer
Model	WEL-1L	WEL-2L	WEL-3L
Capacity	28L	28L*2	28L*3
Dimension(W*D*H)	400*800*935/1160(mm)	800*800*935/1160(mm)	1200*800*935/1160(mm)
Power	3N-380V 50Hz 14kW	3N-380V 50Hz 14kW*2	3N-380V 50Hz 14kW*3
Temp. Range	Room Temp. to 190°C	Room Temp. to 190°C	Room Temp. to 190°C

Product Name	28L Electric Standing Fryer (twin tanks)	28L Electric Standing Fryer with Filtration	28L Auto Lift-up Electric Standing Fryer	Auto Lift-Up Electric Standing Fryer with Filtration
Model	WEL-1L-2	WEL-1LF	WELL-1L	WELL-1LF
Capacity	28L	28L	28L	28L
Dimension(W*D*H)	400*800*935/1160(mm)	400*800*935/1160(mm)	400*915*935/1464(mm)	400*915*935/1464(mm)
Power	3N-380V 50Hz 7kW*2	3N-380V 50Hz 14kW	3N-380V 50Hz 14kW	3N-380V 50Hz 14kW
Temp. Range	Room Temp. to 190°C	Room Temp. to 190°C	Room Temp. to 190°C	Room Temp. to 190°C

# Holding Cabinet (Pass-Through Counter Type)

## FEATURES

- LED digital display clearly indicates parameter for easy reading.
- Built-in microcomputer controller to set temperature respectively for each layer and independent power switch for each layer saves power consumption cost by turning off switch for layer not being used.
- Each layer (front and back) is equipped with 2 independent timers to set warming time between 1 second to 99 minutes 59 seconds for different kinds of foods. Each time controller will not affect other timers' operation. Special design for crispy or moist food by different layer storage.
- Alarm alert gives signal to remind warming time.
- WTC heat patch and aluminum heating plate make heating evenly and constant to efficiently save power consumption up to 30%.
- Front and back pass-through food access with timer indicating the same warming time.
- Heat tolerance is up to 190°C, securing food safety.
- Durable stainless steel body is easy to clean.



WHS-790-2



WHS-520-4

Product Name	4-Layer Holding Cabinet (Pass-Through Counter Type)	2-Layer Holding Cabinet (Pass-Through Counter Type)
Model	WHS-520-4	WHS-790-2
Dimension(W*D*H)	515*630*680(mm)	790*400*320(mm)
Power	220V 50Hz 3.5kW	220V 50Hz 1.8kW
Capacity	4Layers	2Layers
Temp. Range	Room Temp. to 100°C	Room Temp. to 100°C

# Holding Cabinet

## FEATURES

- Hot air circulation enables heat to be distributed to every corner of the cabinet and maintains good thermal balance.
- It can store foods in the high temperature in batches. Enhance the efficiency of food preparation in commercial kitchens.
- Good maintenance of humidity inside the cabinet keeps food moist and fresh for longer time.
- Maintaining high temperature prevents bacteria growth and keeps food safe to consume to meet the HACCP requirement.
- Depending on usage or location, front open door or pass-through door can be selected for easy food storage.
- Optional casters available.



WHT-1140-1D  
WHT-1140-2D



WHT-1940-2D  
WHT-1940-4D

Product Name	1140mm Heated Holding Cabinet (One Door)	1140mm Heated Holding Cabinet (Two Door pass through)	1940mm Heated Holding Cabinet (One Door)	1940mm Heated Holding Cabinet (Two Door pass through)
Model	WHT-1140-1D	WHT-1140-2D	WHT-1940-2D	WHT-1940-4D
Dimension(W*D*H)	710*780*1140(mm)	710*780*1140(mm)	710*780*1940(mm)	710*780*1940(mm)
Power	220V 50Hz 1.8kW	220V 50Hz 1.8kW	220V 50Hz 1.8kW	220V 50Hz 1.8kW
Capacity	240L	240L	540L	540L
Temp. Range	Room Temp. to 99°C	Room Temp. to 99°C	Room Temp. to 99°C	Room Temp. to 99°C

# Milk Chiller

## FEATURES

- The curve design makes the surface elegant and generous.
- With rounded corner inside, non-dead angle enables easy cleaning.
- High density polyurethane foam enable better insulation.
- Stainless steel structure makes it durable and easy to cleaning.
- Door rubber seal can be removable, easy to clean and change.
- Cooling speed is fast, perfectly keep cooling.

Product Name	Milk Chiller
Model	WRT-8L-R1
Dimension(W*D*H)	265*470*574(mm)
Capacity	8L
Power	110V 60Hz 176W/ 220V 60Hz 150W
Compressor Motor	1/11HP Motor
Temp. Range	2-6(°C)
Refrigerant	R134a
Cooling System	Air Cooling



# Curved Glass Warmer Showcase

## FEATURES

- Extra large design, super slim base, maximize the storage space.
- High heat conduction alumium heating board combines radiant heating and presents the best performance. Even temperature distribution within the space meanwhile preserve the humidity of food.
- Adopt special lighting makes the food look even more delicious.
- Professional and elegant design enhances the store image.
- Respective control of lighting and heating to satisfy different needs to precise control the temperature in the showcase.

Product Name	Curved Glass Warmer Showcase
Model	WHS-590C
Dimension(W*D*H)	590*420*726(mm)
Capacity	113L
Power	220V 50Hz 800W
Temp. Range	Room Temp. to 100°C





- \*Model: CRWD500TP
- \*Dimensions : 590x605x840mm / Basket Dimensions : 500x500mm
- \*Capacity : 30Basket / hour
- \*Weight : 61Kg
- \*Electical Connection : 230v/50Hz
- \*Total Power : 5.2Kw
- \*Tank Heating Element : 3.0Kw
- \*Boiler Heating Element : 4.5Kw
- \*Wash Pump Power : 0.65Kw
- \*Tank Capacity : 17Liters / Basket Plate Capacity : 18
- \*Boiler Capacity : 6.2Liters
- \*Washing Water Temp : 55C / Rinsing Water Temp : 85C
- \*Package Dimensions : 600x700x950mm



- \*Dimension: 55x62x140 cm
- \*Net Weight: 220 Kg
- \*Type: Wheeled
- \*Production Capacity:Min: 2 – Max: 7 Lt/Cycle
- \*Cylinder Capacity:Min: 1.5 – Max: 5 Kg
- \*Condensation:Water / Air
- \*Electronic Control:Touch Screen
- \*Voltage: 400 V
- \*Frequency: 50/60Hz
- \*Power: 4.7kW






# COLD KITCHEN



# Commercial Chest Freezer

Flat Glass Sliding Lid Series - 250GL/ 350GL/ 450GL/ 600GL/ 750GL



[www.snow.com.my](http://www.snow.com.my)

Model	UOM	LY 250 GL	LY 350 GL	LY 450 GL	LY 600 GL	LY 750 GL
Product Name		Freezer	Freezer	Freezer	Freezer	Freezer
External Dimensions						
W	mm	824	1049	1329	1659	2094
D	mm	662	662	662	662	662
H	mm	840	865	865	865	865
H1	mm	-	-	-	-	-
Internal Dimensions						
W	mm	695	920	1200	1530	1966
D	mm	530	530	530	530	530
H	mm	703	703	703	703	703
H1	mm	-	-	-	-	-
Total Capacity	L	230	320	420	540	710
Effective Capacity	L	190	260	360	460	600
Lid/door Type		Flat Glass Sliding Lid				
Power Consumption (24h at 30°C ambient)	kWh	2.7	3.2	4	4.4	5.3
Temperature range at 30°C ambient	°C	-18 -22	-18 -22	-18 -22	-18 -22	-18 -22
Net Weight	kg	50	58	75	87	112
Gross Weight	kg	60	70	91	109	137
Compressor Power	hp	1/5	1/4	1/3	1/3	3/8
Color		White	White	White	White	White

#### Outer Panel & Interior Cabinet

Mild steel and galvanised steel sheet with epoxy powder coating

#### Evaporator & Condenser

Zinc coated Bundy tube

#### Insulation

Polyurethane foam, 60mm thick (CFC Free)  
38mm thick for cooler

#### Refrigerant

R 134a (CFC Free)

#### Power Source

220-240v, single phase  
50Hz.



Technical features may change without prior notice

## COUNTERTOP CHILLER

### RTW-100L-3/ RTW-160L-4

- Adjustable coated shelves
- Auto defrost function
- Digital thermostat & temperature display
- Hot air blowing glass door (Anti-Fog)
- Internal LED lighting on top 2 sides
- Maintenance free
- Simple construction and high security
- Ventilated cooling system

Model	RTW-100L-3	RTW-160L-4
Product Name	Chiller	Chiller
External Dimension <i>Length x Width x Height (mm)</i>	705 x 472 x 687	880 x 568 x 686
Capacity	100 Liters	160 Liters
Rate Input Power	190 W/ 195 W	230 W/ 160 W
Power Consumption <i>(30°C ambient)</i>	3.32 kWh / 24h	3.06 kWh / 24h
Refrigerant	R134a	
Temperature Range	2°C ~ 10°C	
Net Weight	39 kg	71 kg
Gross Weight	42.5 kg	73.5 kg
Comp. Power (Hp)	1/4	
Body Colour	Black	
Climate Class	4	




RTW-100L-3



RTW-160L-4

\* Product specification are subject to change without prior notice.

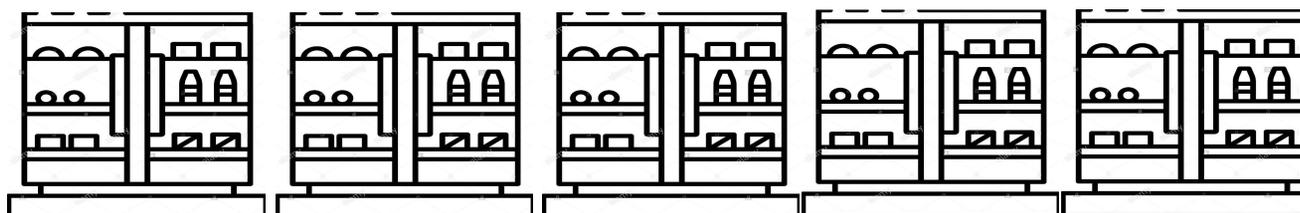

## TWO & THREE DOOR DISPLAY CHILLER/ FREEZER

**LY1000BBC-H/ LY1000BBC-HB |  
LY1500BBC-H/ LY1500BBC-HB**

- Adjustable coated shelves
- Aluminium door frame
- Auto defrost function
- Better at retaining product temperature
- Digital thermostat & temperature display
- Energy saving
- Fin & coil with fan cooling system
- Heated tempered glass door
- Self-closing door
- Suitable for all usage



LY1500BBC-H/  
LY1500BBF-H



LY1500BBC-HB/  
LY1500BBF-HB



LY1000BBC-H/  
LY1000BBF-H



LY1000BBC-HB/  
LY1000BBF-HB

Model	LY1000BBC-H/ LY1000BBC-HB	LY1000BBF-H/ LY1000BBF-HB	LY1500BBC-H/ LY1500BBC-HB	LY1500BBF-H/ LY1500BBF-HB
Product Name	Chiller	Freezer	Chiller	Freezer
External Dimension <i>Length x Width x Height [mm]</i>	1240 x 735 x 2075		1846 x 735 x 2075	
Internal Dimension <i>Length x Width x Height [mm]</i>	1140 x 591 x 1370		1746 x 591 x 1370	
Capacity	923 Liters		1414 Liters	
Rate Input Power	700 W	1180 W	950 W	1850 W
Power Consumption <i>(30°C ambient)</i>	10.0 kWh / 24h	20.0 kWh / 24h	14.0 kWh / 24h	31.0 kWh / 24h
Refrigerant	R134a	R404a	R134a	R404a
Temperature Range	0°C ~ 10°C	-12°C ~ -18°C	0°C ~ 10°C	-12°C ~ -18°C
Net Weight	149 kg	185 kg	218 kg	276 kg
Gross Weight	154 kg	190 kg	226 kg	284 kg
Comp. Power [Hp]	3/8	1	1/2	1 1/2
Body Colour	White/ Black		White/ Black	
Coated Shelves	8 pcs		12 pcs	
Layer Heated Glass Door	Double	Triple	Double	Triple

\* Product specification are subject to change without prior notice.

## SINGLE DOOR DISPLAY CHILLER

### LG-268F/ LG-350F

- Adjustable coated shelves
- Auto defrost function
- Auto water drains + self-evaporates
- Better at retaining product temperature
- Build in lock & key
- Digital thermostat & temperature display
- Energy saving
- Fin & coil with fan cooling system
- Hot air blowing glass door (Anti-Fog)
- Suitable for all usage

Model	LG-268F	LG-350F
Product Name	Chiller	Chiller
External Dimension <i>Length x Width x Height [mm]</i>	530 x 590 x 1845	620 x 630 x 1935
Internal Dimension <i>Length x Width x Height [mm]</i>	440 x 430 x 1225	530 x 473 x 1320
Capacity	268 Liters	350 Liters
Rate Input Power	210 W	255 W
Power Consumption <i>(30°C ambient)</i>	1.9 kWh / 24h	2.86 kWh / 24h
Refrigerant	R134a (CFC Free)	
Temperature Range	0°C ~ 10°C	
Net Weight	64 kg	75 kg
Gross Weight	72 kg	85 kg
Comp. Power [Hp]	1/6	1/4
Body Colour	White	
Coated Shelves	5 pcs	

LG-268F



LG-350F





RT-78L(2R)



RT-78L-3



RT-215L-3

Model	RT-78L(2R)	RT-78L-3	RT-215-3
Product Name	Curved Glass Door	Flat Glass Door	Flat Glass Door
External Dimensions	429x425x980	452x406x966	556x526x1613
Gross Capacity (L)	86	78	215
Rated Input Power (W)	180	190	400
Refrigerant	R-134a	R-134a	R-134a
Temperature Range	0°C - 12°C	0°C - 12°C	2°C - 12°C
Class Mate	4	4	4
Net Weight (kg)	36.5	36	73.5
Special Features	- Front curved glass door	- Low energy consumption - Simple construction and high security - Air duct outside the glass to remove condensation water	

## OPEN SHOWCASE CHILLER

### RTS-360L/ RTS-390L

- Adjustable coated shelves
- Auto defrost function
- 4 castors with 2 brakes
- Condensation water evaporated automatically
- Digital thermostat & temperature display
- Filter mesh in front of the base
- Internal LED lighting on top and each shelf
- Maintenance free
- Side single tempered glass
- Ventilated cooling system
- With night curtain

Model	RTS-360L	RTS-390L
Product Name	Chiller	Chiller
External Dimension <i>Length x Width x Height (mm)</i>	876 x 945 x 1520	920 x 847 x 1510
Capacity	360 Liters	390 Liters
Rate Input Power	1400 W/ 1300 W	
Power Consumption <i>(30°C ambient)</i>	16.87 kWh / 24h	10.70 kWh / 24h
Refrigerant	R404a	
Temperature Range	2°C ~ 10°C	
Net Weight	125 kg	123 kg
Gross Weight	145 kg	143 kg
Comp. Power [Hp]	1/2	3/4
Body Colour	White	Black
Climate Class	6	



RTS-360L



RTS-390L

\* Product specification are subject to change without prior notice.

### 62L Glass door mini fridge

- Dimensions : 410W x 465D x 640H mm
- Temperature Range : 0 ~ 10°C
- Electrical : 220-240v / 50hz - 85 w
- Material : Color steel, polyurethane
- Led : White , With Lock



- An ideal choice for rec rooms, dorm areas, offices, and more.

### 95 L glass door mini fridge

- Size : 460W x 470D x 840H mm
- Temperature Range: 0~10°C
- Material: color steel, polyurethane
- Led/Lock: White/Yes
- Color: black
- Weight: 33kg



### 46 L glass door mini fridge

- Size : 410W x 465D x 480H mm
- Temperature Range: -3~10°C
- Material: color steel, polyurethane
- Led/Lock: White/Yes
- Color: black
- Weight: 23kg



### 2 Door Beer Cooler (Black)

- 900x 550x 860H mm
- CAPA : 230L/ Temperature : 2~8°C
- 220v/ 50hz/ 1/ 200w/ 60kg
- Packing Size : 940x 600x 910H mm




# S series B type black bar freezer


- Automatic evaporation of condensed water ■ Refrigerant: R134a No Frost




MODEL	SHB-108LF
Temperature	Refrigeration (2~8°C)
Volume	108 L
Dimensions	W500*D550*H860mm
Power	220W

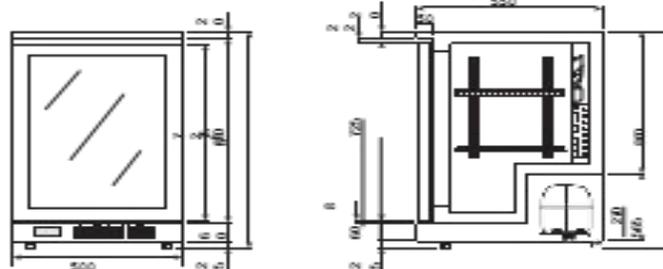

MODEL	SHB-230L2F
Temperature	Refrigeration (2~8°C)
Volume	230 L
Dimensions	W900*D550*H860mm
Power	285 W

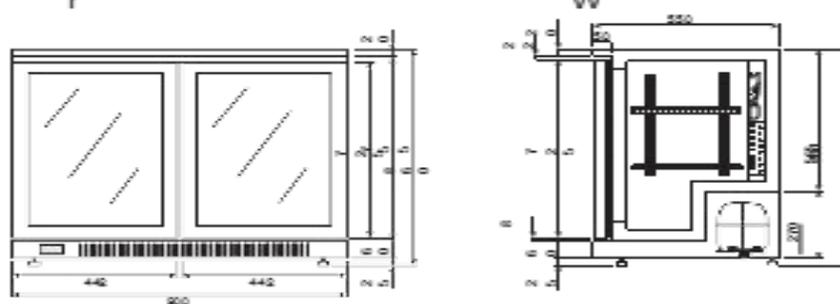

MODEL	SHB-350L3F
Temperature	Refrigeration (2~8°C)
Volume	350 L
Dimensions	W1350*D550*H860mm
Power	385 W

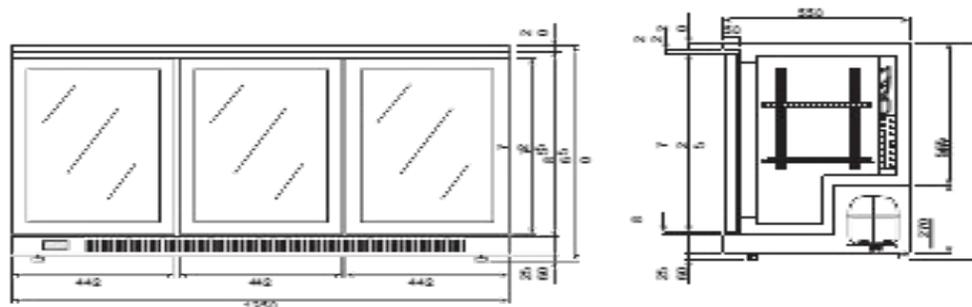




## CUBE ICE MACHINE

Under-Counter Type - Exclusive



MODEL	SK-51B	SK-81B	SK-101B
Ice Production	50kg / 24h	80kg / 24h	100kg / 24h
Ice Storage	30 kg	30 kg	30 kg
Power	465 w	660 w	660 w
Gross Weight	50 kg	65 kg	67 kg
Dimension	666 × 637 × 775 mm	666 × 637 × 775 mm	666 × 637 × 775 mm

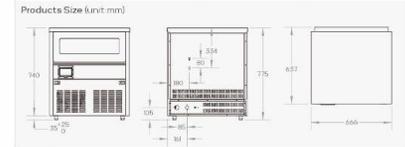

### Summary table

Model	Output 24hrs	Ice Storage	Power	Gross Weight	Net Dimension [Feet Included (W × D × H/mm)]
SK-51B	50 kg / 24 h	30 kg	465 w	50 kg	666 × 637 × 775 mm
SK-81B	80 kg / 24 h	30 kg	660 w	65 kg	666 × 637 × 775 mm
SK-101B	100 kg / 24 h	30 kg	660 w	67 kg	666 × 637 × 775 mm



06-07



Cube Ice Machine


## CRESCENT




## CRESCENT ICE MACHINE



MODEL	SK-220M	SK-280M
Ice Production	95kg / 24h	127kg / 24h
Ice Storage	40 kg	40 kg
Power	770 w	780 w
Gross Weight	70 kg	77 kg
Dimension	650 × 651 × 1063 mm	650 × 651 × 1063 mm

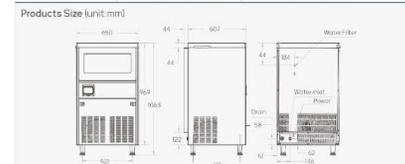

MODEL	SK-320M	SK-620M
Ice Production	145kg / 24h	280kg / 24h
Ice Storage	125 kg	125 kg
Power	850 w	1800 w
Gross Weight	118 kg	131 kg
Dimension	583 × 830 × 1897 mm	583 × 830 × 1897 mm

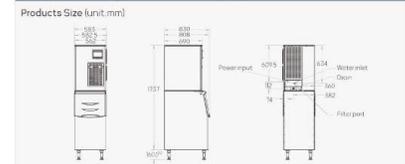

### Summary table

Model	Output 24hrs	Ice Storage	Power	Gross Weight	Net Dimension [Feet Included (W × D × H/mm)]
SK-220M	95 kg / 24h	40 kg	770 w	70 kg	650 × 651 × 1063 mm
SK-280M	127 kg / 24h	40 kg	780 w	77 kg	650 × 651 × 1063 mm
SK-320M	145 kg / 24h	125 kg	850 w	118 kg	583 × 830 × 1897 mm
SK-620M	280 kg / 24h	125 kg	1800 w	131 kg	583 × 830 × 1897 mm

Crescent Ice Machine

16-17

H  
C  
M  
I  
N  
E  
  
I  
C  
E  
  
P  
I  
T  
/

# Company Profile

The foundation of every WISE product is well-defined and customer-oriented. We are the manufacturer and trade company through 35 years experience of development, together with top-notch technology and complete after-sales service network. WISE has two extensive lines of electric kitchen equipment and commercial restaurant refrigeration. In order to follow the ever-changing trend, our company strives to reach the goal to 'Wise your kitchen' to sincerely serve our valued customers. In addition, we welcome all kinds of feedback and suggestion for mutual understanding and further cooperation. The future of culinary world lies in the hand of young generations and the journey starts from a well-equipped kitchen environment. It is such an honor for WISE to be part of the journey.



## Production Line

Guangzhou, Foshan factory implements precise and normative management to ensure our quality of products



## ISO/CE Certificates & Patents

ISO/CE Certificates & Patents Company is attested by both ISO9000:2000 & CE in order to meet customers' needs satisfactorily by our exclusive products & services.



## Our Craftsmanship

Take one look at WISE products and you know it has been well-crafted. The intricate details, perfected joints and unique design features are just a few giveaways, but it is also its durability that completes your commercial kitchen and its unique style. Above all, the traditional methods we use to craft your ideal commercial kitchen equipments are what WISE pride ourselves on. We have established a highly regarded balance between new and exciting product innovations and good old-fashioned craftsmanship by applying both mechanical and manual way to make sure every product is produced in a refined fashion.



## Upright Chiller/ Freezer

## Upright Chiller/ Freezer



Removable refrigeration system

Compact fan motor unit

Adjustable wiring units


Super large capacity

Through intensive research and the application of WISE R&D team innovative design, WISE refrigeration series is available as a refrigerator or freezer. The diverse options range from single, double or split doors for upright reach-ins that make our products most appealing to customers' various needs.

### EASY TO OPERATE DESIGNED



To adopt MORRILL motor, more stable and durable



Special coating durable evaporator fins



Smart operation panel

### USER-FRIENDLY



Light & Durable door handles



Auto Close Doors



GN Pan(optional)

### EASY MAINTENANCE



Detachable Gasket



Rounded corners



Caster option



WRT-515L-R2  
WRT-575L-R2-E  
WRT-515L-F2  
WRT-575L-F2-E

WRT-1075L-R4  
WRT-1200L-R4-E  
WRT-1075L-F4  
WRT-1200L-F4-E

WRT-1635L-R6  
WRT-1635L-F6

### FEATURES:

- Professional economic type refrigerator, super large capacity, economical and practical.
- Auto closing door.
- Automatic defrost function.
- Thermal insulation design.
- Free of dead corners.
- 150mm adjustable stainless steel legs with optional heavy duty casters.
- High density polyurethane foam enables better insulation.
- Adjustable wiring shelves to meet different storage needs comes in PVC coated wire shelves or SS wire shelves.

Product Name	Model	Dimension(W*D*H)	Capacity	Power	Compressor Motor	Temp. Range	Cooling System
2 Doors Stainless Steel Upright Chiller	WRT-515L-R2	620*805*2050(mm)	515L	220V 50Hz 410W	压缩机1/3HP Motor	2~8(°C)	Air Cooling
2 Doors Stainless Steel Upright Freezer	WRT-515L-F2			220V 50Hz 570W	压缩机3/4HP Motor	-13~-18(°C)	
4 Doors Stainless Steel Upright Chiller	WRT-1075L-R4	1200*805*2050(mm)	1075L	220V 50Hz 565W	压缩机1/2HP Motor	2~8(°C)	Air Cooling
4 Doors Stainless Steel Upright Freezer	WRT-1075L-F4			220V 50Hz 808W	压缩机1HP Motor	-13~-18(°C)	
6 Doors Stainless Steel Upright Chiller	WRT-1635L-R6	1785*805*2050(mm)	1635L	220V 50Hz 754W	压缩机1HP Motor	2~8(°C)	Air Cooling
6 Doors Stainless Steel Upright Freezer	WRT-1635L-F6			220V 50Hz 1100W	压缩机1HP Motor	-13~-18(°C)	
2 Doors Stainless Steel Upright Chiller(European Standard)	WRT-575L-R2-E	680*835*2050(mm)	575L	220V 50Hz 410W	压缩机1/3HP Motor	2~8(°C)	Air Cooling
2 Doors Stainless Steel Upright Freezer(European Standard)	WRT-575L-F2-E			220V 50Hz 570W	压缩机3/4HP Motor	-13~-18(°C)	
4 Doors Stainless Steel Upright Chiller(European Standard)	WRT-1200L-R4-E	1300*835*2050(mm)	1200L	220V 50Hz 565W	压缩机1/2HP Motor	2~8(°C)	Air Cooling
4 Doors Stainless Steel Upright Freezer(European Standard)	WRT-1200L-F4-E			220V 50Hz 808W	压缩机1HP Motor	-13~-18(°C)	



## Upright Chiller/ Freezer

## Dual Temperature Upright Refrigerator



WRT-515L-R2-W  
WRT-515L-F2-W



WRT-1075L-R4-W  
WRT-1075L-F4-W



WRT-1635L-R6-W  
WRT-1635L-F6-W

### FEATURES:

- Professional economic type refrigerator, super large capacity, economical and practical.
- Auto closing door.
- Automatic defrost function.
- Thermal insulation design.
- Free of dead corners.
- 150mm adjustable stainless steel legs with optional heavy duty casters.
- High density polyurethane foam enables better insulation.
- Adjustable wiring shelves to meet different storage needs comes in PVC coated wire shelves or SS wire shelves.

Product Name	Model	Dimension(W*D*H)	Capacity	Power	Compressor Motor	Temp. Range	Cooling System
2 Doors Stainless Steel Upright Chiller	WRT-515L-R2-W	620*805*2050(mm)	515L	220V 50Hz 410W	压缩机1/3HP Motor	2~-8(°C)	Air Cooling
2 Doors Stainless Steel Upright Freezer	WRT-515L-F2-W			220V 50Hz 570W	压缩机3/4HP Motor	-13~-18(°C)	
4 Doors Stainless Steel Upright Chiller	WRT-1075L-R4-W	1200*805*2050(mm)	1075L	220V 50Hz 565W	压缩机1/2HP Motor	2~-8(°C)	Air Cooling
4 Doors Stainless Steel Upright Freezer	WRT-1075L-F4-W			220V 50Hz 808W	压缩机1HP Motor	-13~-18(°C)	
6 Doors Stainless Steel Upright Chiller	WRT-1635L-R6-W	1785*805*2050(mm)	1635L	220V 50Hz 754W	压缩机1HP Motor	2~-8(°C)	Air Cooling
6 Doors Stainless Steel Upright Freezer	WRT-1635L-F6-W			220V 50Hz 1100W	压缩机1HP Motor	-13~-18(°C)	



WRT-520L-DT-2



WRT-1200L-DT-4

### FEATURES:

- Professional economic type refrigerator, super large capacity, economical and practical.
- Auto closing door and auto defrost function.
- Free of dead corners and thermal insulation design.
- Two-door dual temperature upright refrigerator (The upper cabinet is for freezer, and the lower cabinet is for chiller)
- Four-door dual temperature upright refrigerator (Custom design the left and right cabinet for freezer or chiller)
- 150mm adjustable stainless steel legs with optional heavy duty casters.
- Adjustable wiring shelves to meet different storage needs comes in PVC coated wire shelves or SS wire shelves.
- High density polyurethane foam enables better insulation.
- The characteristic of the single compressor motor and dual temperature control enables the refrigerators to have both freezer and chiller cabinets and independent temperature display and operation panel.

Product Name	Model	Dimension(W*D*H)	Capacity	Power	Compressor Motor	Temp. Range	Cooling System
2 door Upright double temperature refrigerator	WRT-520L-DT-2	620*810*2050(mm)	260L+260L	220V 50HZ 670W	5/8HP Motor	Chiller 2 ~ 8(°C) Freezer -13 ~ -18(°C)	Air Cooling
4 door Upright double temperature refrigerator	WRT-1200L-DT-4	1300*838*2050(mm)	600L+600L	220V 50HZ 900W	7/8HP Motor	Chiller 2 ~ 8(°C) Freezer -13 ~ -18(°C)	Air Cooling



Detachable Gasket



Rounded corners



Caster option



## Undercounter Chiller/ Freezer



Through intensive research and the application of WISE R&D team innovative design, WISE refrigeration series is available as a refrigerator or freezer. The diverse options range from single, double or split doors for upright reach-ins that make our products most appealing to customers' various needs.

### USER-FRIENDLY




Auto Close Doors



Light & Durable door handles

### EASY TO OPERATE DESIGNED



Special coating durable evaporator fins



Smart operation panel



Eco-friendly Switch

### EASY MAINTENANCE



Detachable Gasket



Rounded corners



Easy access to removable filters

## Undercounter Chiller/ Freezer

WRW-142L-R1  
WRW-175L-R1  
WRW-142L-F1  
WRW-175L-F1



WRW-290L-R2  
WRW-385L-R2  
WRW-290L-F2  
WRW-385L-F2



WRW-213L-R2  
WRW-280L-R2  
WRW-213L-F2  
WRW-280L-F2



WRW-367L-R3  
WRW-520L-R3  
WRW-367L-F3  
WRW-520L-F3



### FEATURES:

- Professional economic type refrigerator, super large capacity, economical and practical.
- Auto closing door.
- Automatic defrost function.
- Thermal insulation design.
- Free of dead corners.
- 150mm adjustable stainless steel legs with optional heavy duty casters.
- High density polyurethane foam enables better insulation.
- Adjustable wiring shelves to meet different storage needs comes in PVC coated wire shelves or SS wire shelves.
- The machine unit can be extracted easily, convenient for maintenance.
- Equipped with individually micro switch which can control the embed evaporator fan inside the machine, when opened the door, the fan stops rotating so that reducing cold air loss. (Freezer only)

Product Name	Model	Dimension(W*D*H)	Capacity	Power	Compressor Motor	Temp. Range	Cooling System
90CM Standard Undercounter Chiller	WRW-142L-R1	900*600*850(mm)	142L	220V 50Hz 350W	1/4HP Motor	2~8(°C)	Air Cooling
	WRW-175L-R1	900*750*850(mm)	175L				
90CM Standard Undercounter Freezer	WRW-142L-F1	900*600*850(mm)	142L	220V 50Hz 530W	1/3HP Motor	-13~-18(°C)	
	WRW-175L-F1	900*750*850(mm)	175L				
120CM Standard Undercounter Chiller	WRW-213L-R2	1200*600*850(mm)	213L	220V 50Hz 350W	1/4HP Motor	2~8(°C)	
	WRW-280L-R2	1200*750*850(mm)	280L				
120CM Standard Undercounter Freezer	WRW-213L-F2	1200*600*850(mm)	213L	220V 50Hz 530W	1/3HP Motor	-13~-18(°C)	
	WRW-280L-F2	1200*750*850(mm)	280L				
150CM Standard Undercounter Chiller	WRW-290L-R2	1500*600*850(mm)	290L	220V 50Hz 350W	1/3HP Motor	2~8(°C)	
	WRW-385L-R2	1500*750*850(mm)	385L				
150CM Standard Undercounter Freezer	WRW-290L-F2	1500*600*850(mm)	290L	220V 50Hz 530W	3/4HP Motor	-13~-18(°C)	
	WRW-385L-F2	1500*750*850(mm)	385L				
180CM Standard Undercounter Chiller	WRW-367L-R3	1800*600*850(mm)	367L	220V 50Hz 390W	1/3 HP Motor	2~8(°C)	
	WRW-520L-R3	1800*750*850(mm)	520L				
180CM Standard Undercounter Freezer	WRW-367L-F3	1800*600*850(mm)	367L	220V 50Hz 604W	3/4HP Motor	-13~-18(°C)	
	WRW-520L-F3	1800*750*850(mm)	520L				



## Undercounter Chiller/ Freezer

WRW-142L-R1-W  
WRW-175L-R1-W  
WRW-142L-F1-W  
WRW-175L-F1-W



WRW-290L-R2-W  
WRW-385L-R2-W  
WRW-290L-F2-W  
WRW-385L-F2-W



WRW-213L-R2-W  
WRW-280L-R2-W  
WRW-213L-F2-W  
WRW-280L-F2-W



WRW-367L-R3-W  
WRW-520L-R3-W  
WRW-367L-F3-W  
WRW-520L-F3-W



### FEATURES:

- Professional economic type refrigerator, super large capacity, economical and practical.
- Auto closing door.
- Automatic defrost function.
- Thermal insulation design.
- Free of dead corners.
- 150mm adjustable stainless steel legs with optional heavy duty casters.
- High density polyurethane foam enables better insulation.
- Adjustable wiring shelves to meet different storage needs comes in PVC coated wire shelves or SS wire shelves.
- The machine unit can be extracted easily, convenient for maintenance.
- Equipped with individually micro switch which can control the embed evaporator fan inside the machine, when opened the door, the fan stops rotating so that reducing cold air loss. (Freezer only)

Product Name	Model	Dimension(W*D*H)	Capacity	Power	Compressor Motor	Temp. Range	Cooling System
90CM Undercounter Chiller	WRW-142L-R1-W	900*600*850(mm)	142L	220V 50Hz 350W	1/4HP Motor	2~8(°C)	Air Cooling
	WRW-175L-R1-W	900*750*850(mm)	175L				
90CM Undercounter Freezer	WRW-142L-F1-W	900*600*850(mm)	142L	220V 50Hz 530W	1/3HP Motor	-13 ~ -18(°C)	
	WRW-175L-F1-W	900*750*850(mm)	175L				
120CM Undercounter Chiller	WRW-213L-R2-W	1200*600*850(mm)	213L	220V 50Hz 350W	1/4HP Motor	2~8(°C)	Air Cooling
	WRW-280L-R2-W	1200*750*850(mm)	280L				
120CM Undercounter Freezer	WRW-213L-F2-W	1200*600*850(mm)	213L	220V 50Hz 530W	1/3HP Motor	-13 ~ -18(°C)	
	WRW-280L-F2-W	1200*750*850(mm)	280L				
150CM Undercounter Chiller	WRW-290L-R2-W	1500*600*850(mm)	290L	220V 50Hz 350W	1/3HP Motor	2~8(°C)	Air Cooling
	WRW-385L-R2-W	1500*750*850(mm)	385L				
150CM Undercounter Freezer	WRW-290L-F2-W	1500*600*850(mm)	290L	220V 50Hz 530W	3/4HP Motor	-13 ~ -18(°C)	
	WRW-385L-F2-W	1500*750*850(mm)	385L				
180CM Undercounter Chiller	WRW-367L-R3-W	1800*600*850(mm)	367L	220V 50Hz 390W	1/3 HP Motor	2~8(°C)	Air Cooling
	WRW-520L-R3-W	1800*750*850(mm)	520L				
180CM Undercounter Freezer	WRW-367L-F3-W	1800*600*850(mm)	367L	220V 50Hz 604W	3/4HP Motor	-13 ~ -18(°C)	
	WRW-520L-F3-W	1800*750*850(mm)	520L				

## Undercounter Chiller/ Freezer(Tube Cooling)



WRW-200L-R2-WT  
WRW-260L-R2-WT  
WRW-200L-F2-WT  
WRW-260L-F2-WT



WRW-275L-R2-WT  
WRW-357L-R2-WT  
WRW-275L-F2-WT  
WRW-357L-F2-WT

### FEATURES:

- Professional economic type refrigerator, super large capacity, economical and practical.
- Cool rapidly and the food won't be dry out, which can help to keep the original flavor of the food.
- Thermal insulation design helps to save energy.
- Auto closing door, user friendly operation.
- Assembling with the famous compressor, stable performance and no noise in the running process.
- 150mm adjustable stainless steel legs with optional heavy duty casters.
- Adjustable wiring shelves to meet different storage needs comes in PVC coated wire shelves or SS wire shelves.
- High density polyurethane foam enables better insulation.



Detachable Gasket



Rounded corners



Caster option



Product Name	Model	Dimension(W*D*H)	Capacity	Power	Compressor Motor	Temp. Range	Cooling System
120CM Standard Undercounter Chiller	WRW-200L-R2-WT	1200*600*850(mm)	200L	220V 50Hz 350W	3/8HP Motor	2~8(°C)	Tube Cooling
	WRW-260L-R2-WT	1200*750*850(mm)	260L				
120CM Standard Undercounter Freezer	WRW-200L-F2-WT	1200*600*850(mm)	200L	220V 50Hz 400W	3/8HP Motor	-13 ~ -18 (°C)	
	WRW-260L-F2-WT	1200*750*850(mm)	260L				
150CM Standard Undercounter Chiller	WRW-275L-R2-WT	1500*600*850(mm)	275L	220V 50Hz 350W	3/8HP Motor	2~8(°C)	Tube Cooling
	WRW-357L-R2-WT	1500*750*850(mm)	357L				
150CM Standard Undercounter Freezer	WRW-275L-F2-WT	1500*600*850(mm)	275L	220V 50Hz 400W	3/8HP Motor	-13 ~ -18 (°C)	
	WRW-357L-F2-WT	1500*750*850(mm)	357L				

## Pizza Prep Refrigerator

### FEATURES:

- Especially designed for pizzeria to store diverse food ingredients and offer a smooth process to prepare pizza.
- With blue LED tube inside the machine, the light is soft and graceful.
- Auto closing door.
- Automatic defrost function.
- Free of dead corners.
- Thermal insulation design.
- 150mm adjustable stainless steel legs with optional heavy duty casters.
- Height adjustable wire shelves to meet different storage needs with optional PVC coated wire shelves or SS wire shelves.
- High density polyurethane foam enables better insulation.
- With removeable refrigeration unit, convenient to repair, replacement and installation.



### Pizza Size



6" Personal Pizza



9" Regular Pizza



12" Large Pizza



Equipped with blue ray lighting



Easy cleaning for leftover

Product Name	Model	Dimension(W*D*H)	Capacity	Power	Compressor Motor	Temp. Range	Cooling System
Pizza Prep Refrigerator	WRWS-405L-R2-P	1500*750*850/1100(mm)	405L	220V 50Hz 495W	1/3HP Motor	2~7(°C)	Air Cooling

## Milk Chiller

### FEATURES:

- The curve design makes the surface elegant and generous.
- With rounded corner inside, non-dead angle enables early cleaning.
- High density polyurethane foam enable better insulation.
- Stainless steel structure makes it durable and easy to cleaning.
- Door rubber seal can be removable, easy to clean and change.
- Cooling speed is fast, perfectly keep cooling.



Product Name	Model	Dimension(W*D*H)	Capacity	Power	Compressor Motor	Temp. Range	Cooling System
Milk Chiller	WRT-8L-R1	265*470*574(mm)	8L	110V 60Hz 176W/ 220V 60Hz 150W	1/11HP Motor	2~6(°C)	Air Cooling

## Single Glass Door Display Fridge

### FEATURES:

- Adopt imported fully enclosed compressor, low noise, low power consumption.
- Adopt the high quality stainless steel material, durable, easy to clean.
- Beautiful appearance, adopt polyurethane foam insulation materials, good heat preservation.
- Adopt direct cooling, air cooling refrigeration, fin condenser. Advanced technology, good cooling effect.



Product Name	Model	Dimension(W*D*H)	Capacity	Power	Compressor Motor	Temp. Range	Cooling System
Single Glass Door Display Fridge	WRST-300L-R1	640*665*1920(mm)	300L	220V 50Hz 265W	1/3HP Motor	2~7(°C)	Air Cooling

## Double Glass Door Display Fridge

### FEATURES:

- Adopt imported fully enclosed compressor, low noise, low power consumption.
- Adopt the high quality stainless steel material, durable, easy to clean.
- Beautiful appearance, adopt polyurethane foam insulation materials, good heat preservation.
- Adopt direct cooling, air cooling refrigeration, fin condenser. Advanced technology, good cooling effect.



Product Name	Model	Dimension(W*D*H)	Capacity	Power	Compressor Motor	Temp. Range	Cooling System
Double Glass Door Display Fridge (Cartridge Style)	WRG-1000L-R2	1400*700*2050(mm)	1000L	220V 50Hz 750W	1HP Motor	2~7(°C)	Air Cooling

# BEVERAGE EQUIPMENT





## Heat Cups sealer machine

Double screen (Temp, Figure)

250x392x530mm

24KG

540-640cups/H



## MILK STEAMER BOILER MACHINE

- Model : JQ101

- Dimension : 300x300x595mm

- Voltage : 220v/50hz/15amps

- Standard Power : 2kw

- Capacity : 8.5L



## FRUCTOSE MACHINE

Model : HLG9EN

Dimension : 210x370x450mm

Voltage : 220V/50Hz/1

Capacity : 7L

Second dispensugar syrup

Auto Lock Dispencer Hole

16 Button

304 Stainless Steel



CUPS SEALER FILM 3000PCS (PAPER /PP PLASTIC)Standard Desgin



**BevGuard**  
FILTRATION SYSTEMS

**SPEC SHEET**

**BGE-3200S**

This BevGuard® brand water filter contains a polyphosphate scale inhibitor and a 0.5 Micron compressed coconut shell carbon block. The scale inhibitor reduces the accumulation of minerals that lead to hard water spots from lime scale build up on equipment. The carbon block provides tremendous capacity to reduce impurities and sediment that may be present in your drinking water. The carbon block has millions of active sites on its surface and within the structure which can absorb impurities like a sponge, and can attract and hold other types of impurities to its surface like a magnet. Additionally, this filter can catalytically breakdown other impurities very similar to the way a catalytic converter works in your automobile. These processes ensure that you are getting the cleanest and best tasting water possible.

This economical filter will provide you with months of protection by reducing hard water build-up in any beverage or food equipment application.

**REPLACES:**

- Everpure®: 4H Filter, 4K Plus, H-100, H-104, MD-CD, OW4-Plus

**FILTER FEATURES:**

- NSF Certified
- Economical alternative to expensive filter substitutes
- Delivers clean, clear water that looks and tastes great
- Reduces sand, silt, sediment, rust, chlorine taste and odor that may be present in your drinking water
- Designed to provide up to 29,000 gallons of life
- Does not remove minerals which may be beneficial to health

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

<b>Micron Rating:</b>	0.5 micron
<b>Dimensions:</b>	16½" x 3½" (41.90 cm x 8.1 cm)
<b>Min Operating Pressure:</b>	25 psi (1.7 bar)
<b>Max Operating Pressure:</b>	125 psi - (8.6 bar)
<b>Operating Temperature:</b>	35-100°F (1.7°C - 38°C)
<b>Flow Rate:</b>	2.1 gpm (7.95 lpm)
<b>Life:</b>	29,000 gallons (109,500 liters)

\*Everpure is a registered trademark of Everpure Inc. Northbrook, IL.





**المجلس الإسلامي الأمريكي للغذاء و التغذية**  
**THE ISLAMIC FOOD AND NUTRITION COUNCIL OF AMERICA**  
 P.O. BOX 59772 Chicago, IL 60646  
 Toll Free Phone (877) 425-2523 • Phone: (847) 993-0040 • Fax: (847) 993-0038

**IFANCA HALAL PRODUCT CERTIFICATE**

Document No.: **AQU 17175 17176 220002 US**

March 29, 2022

**Aquamor, LLC**  
 42188 Rio Nedo  
 Temecula, California 92563 USA

To Whom It May Concern:

This is to certify that **Aquamor, LLC, Temecula, California, USA** produces **Halal** products under the supervision of the Islamic Food and Nutrition Council of America (IFANCA) in conformity with IFANCA scheme and the following standards:

**UAE.S 2055 - 1: 2015**

The following products are certified to be **Halal**.

**Product Type: Water Treatment Chemicals**

Product Code	Product Name
8 52535 00418 9	BevGuard BGE-3200
8 52535 00419 6	BevGuard BGE-3200S
8 52535 00421 9	BevGuard BGE-4200
8 52535 00422 6	BevGuard BGE-4200S

This certificate is valid until **March 31, 2023** and subject to renewal at that time.

*Muhammad Munir Chaudry*  
 Muhammad Munir Chaudry, PhD  
 President



IFANCA Head Office: 2004 Miner St., Des Plaines, IL 60016, USA Tel: 847-993-0034  
[WWW.IFANCA.ORG](http://WWW.IFANCA.ORG)



## Saeco Fully Auto Coffee

### Machine

Product Model: Lirika OTC  
(SUP041EU)

Voltage: 220V-50Hz/1700w

Water Tank: 2500ml

Bean Tank: 500g

Pressur Pump: 19.5bar

Coffee grounds: 15 bar

Capacity: 50ml/50cups

Dimension: 215x370x429(mm)



### Coffee Grinder Machine

- Model : CRM9083

- Dimension :  
210x300x570mm

- Voltage : 220V/50Hz/1/2HP

- Standard Power :  
1200W/1400(R.P.M)

- Funnel Capacity : 1.2 Kg

- Crush Power : 10-15 Kg /  
hours

- Weight : 13 Kg





**EVERPURE  
EV9293-22**  
COLDRINK  
/INSURICE  
TWIN MANIFOLD WITH  
20" PREFILTER

Commercial-grade filter head for Everpure filter cartridges Includes mounting box bracket and screws for fast and easy installation; no extra mounting plate is required Optional built-in water shut-off valve and flushing valve makes cartridge change-outs easy Cartridge nesting feature provides a more secure, durable fit



**EVERPURE  
®  
COLDRINK  
EV9293-21**  
/INSURICE  
®  
MANIFOLD WITH  
20" PREFILTER

Commercial-grade filter head for Everpure filter cartridges Includes mounting box bracket and screws for fast and easy installation; no extra mounting plate is required Optional built-in water shut-off valve and flushing valve makes cartridge change-outs easy Cartridge nesting feature provides a more secure, durable fit



**EVERPURE  
4FC-S FILTER  
CARTRIDGE  
EV9692-31**

Increased capacity for extended reduction of chemical and mechanical contaminants  
Balanced cartridge for optimum performance in varying water qualities  
Integrated beaded phosphate with levels specifically selected for greater life and scale inhibition





### SODA EXPRESS PINACLE SODA MAKER

- New patented fizz infuser to carbonate "any and all liquids"
- Detachable infuser for easy cleaning
- Simple to use Click Press Release steps
- No batteries or external power required
- Creates sparkling water within seconds
- Sleek and modern design

- 1 x PINNACLE Sparkling Water Machine
- 1 x Carbonating Gas Cylinder
- 1 x 1L Carbonating Bottle
- 1 Year Warranty



#### Step 1: CLICK

Insert the bottle into the dock  
& twist bottle until it clicks to lock.



#### Step 2: PRESS

Press the main button once  
to carbonate water.




#### Step 3: RELEASE

Press small button to unlock bottle  
& remove bottle from dock.

### HEAT PULL CAN BOTTLE SEALER MACHINE

- Dimension : 635X350X200mm
- Voltage : 220v/50/1/370w
- Seal Can Diameter : 55mm
- Weight : 32kg
- Colour : Black

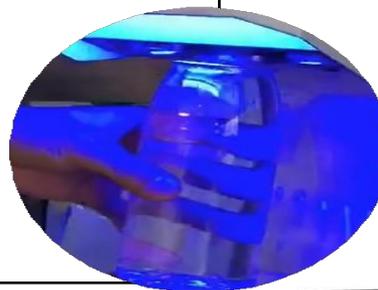




## HEAT WATER BOILER 8L

- Model : HB-8L
- Dimensions: 190x240x490mm
- Power : 220V/50Hz/2500W
- Capacity : 30 Liter
- Micro Computer Control
- Stainless Steel Body
- 304 Stainless Steel inside pot

## HEAT WATER BOILER 20L

- Model : HGSK02A
- Dimensions : 365x390x600mm
- Power : 220v/50Hz/3000W/15amps
- Tank Capacity: 20 Liter
- Production :100 Liter / Hour
- 8 minute get 100°C

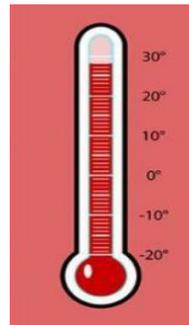

**HEAT**  
KITCHEN EQUIPMENT



## Vitamix The Quiet One

- Dimensions : 216x295x622mm
- Output Power : 1300-1550W / 10 amps/ 3HP
- 6 pre-set program buttons on touch-pad.
- 1.4 Ltr high-impact, clear/stackable Advance® container, complete with Advance® blade assembly and lid
- Efficient container and blade configuration that can power through various ingredients like frozen fruit, whole fruit and ice with liquid.
- Magnetically sealed sound enclosure.



## Touch n go advance

- Dimension : 49.2Hx23.5Wx26.7D cm
- Motor : 2 peak output horsepower
- Electrical : 220-240V, 50/60Hz , 1057-1200w
- Net Weight : 7.7Kg
- The T&G offer reduced sound and blending time. It quickly and easily creates smoothies, frappes, ice cream drinks and frozen cocktails
- 2 Peak out HP motor and sound-reducing cover for superior performance in coffee, smoothie, and ice cream shops.
- 34 Optimized programs engineered to provide consistent results quickly and easily.
- Advance : container creates faster, smoother pouring and has a longer blade life resulting in time and cost savings along with improved customer experience.

## Vitamix Prep 3

- Dimensions : 514H x 203W x 229D mm
- Jug Capacity : 2L , Motor Power (Watts) : 2100
- Electrical : 220-240 V, 50 Hz
- Output Power 1100 - 1200 W
- Weight : 5.5kg
- Variable speed and accelerator tool allows for control and easy processing of dense ingredients .
- Advanced cooling fan for optimum reliability during peak hours of operation .
- Patented, high-impact container is clear for seeing ingredients during operation .



## Vitamix Drink

### Machine Advance

- Dimensions : 203x229x450mm
- 2.3 peak output horsepower motor
- 6 Preset program by different timer
- 1.4L Advance Container
- Auto shut off , Heavy Duty
- Tritan Material BPA Free container



## Vitamix 2 Speed

- Dimensions : 203x229x514mm
- High and low Speed , 2.0L Tritan Material BPA Free Container

- 2 Peak Hourspower , Heavy Duty





漩茶機 / 奶蓋機

**EJ816**  
多功能智慧漩茶機



产品参数

Product parameters

品 名: 蓄热式泡茶机

Product Name

型 号: YT-10T

Model

电 压: 220V/50Hz

Voltage

功 率: 3100w

Power

外观尺寸: 255x522x738mm

Dimension

重 量: 19kg

Weight



产品细节

Product details



多功能  
可自定义面板

Multifunctional  
customizable panel

高效保温  
大容量锅炉

High efficiency insulation  
Large capacity boiler



大空间  
防烫茶桶

Large space  
Anti scalding tea bucket





5

雪克杯

5秒雪克一杯起  
沫红茶（奶茶）



4

萃茶杯

40秒萃取一杯香味  
浓郁的黄金茶汤



3

冰沙杯

30秒打出一杯冰凉  
爽口的无水冰沙



2

奶盖杯

20秒轻松完成一杯  
口感绵密的奶泡





Mirra 300 Y09



Canova 300



Tips for Thinly Slicing Raw Beef

Model	Canova 300	Mirra 300 Y09	Palladio 300 Automec
Ø blade	300mm	300mm	300mm
Motor	210Watt - 29Hp	210Watt - 29Hp	275 Watt - 37Hp
Cut thickness	19mm	13mm	30mm
Run of carriage	275mm	285mm	310mm
Hopper	250x275mm	250x275mm	365x270mm
Dimensions (DxWxH)	640x495x495 mm	640x610x510mm	685X660X750 mm
Net Weight	26Kg	20Kg	55Kg
Gross Weight	29Kg	23Kg	70Kg



Palladio 300 Automec





Saw blade (in)	77.953" (1980mm)
Blade speed	72.07 ft/sec
Throat width (in)	8.66"
Throat height (in)	12.99"
Table dimensions (WxL)	18.11" x 22.05" (460mm x 560mm)
Switch type	Push Button
Epoxy enamel	Yes
Waste tray	No
Movable blade guard	Yes
Sealed off bearings	Yes
Non slip silent V-belt drive	No
Net weight	60 Kg
Shipping weight/cube	127 Kg / 229 cf
Voltage	220/50/60/1, 220/60/3 or 380/50/3



Motor	1 HP 0.74 kW
Electric	115/60/1 or 220/50/60/1
Grinding capacity first ground	13 Kg/min (28.66 lbs./min) (3/8")
Grinding capacity second ground	6.5 Kg/min (14.33 lbs./min) (1/8")
Pan dimensions (L x W x H)	763.5 mm x 420 mm x 80.9 mm (30.06" x 16.54" x 9.84")
Machine dimensions (L x W x H)	790.1 mm x 420 mm x 521.9 mm (31.11" x 16.54" x 16.62")
Net weight	57 Kg (125.66 lbs)
Shipping weight	74 Kg (163.14 lbs)



Saw blade (Inches)	2950 mm (116.14" x .5/8")
Blade speed	16 m/sec (52.49 ft/sec)
Throat width (Inches)	340 mm (13.39")
Throat height (Inches)	420 mm (16.54")
Table dimensions (WxL)	890 mm x 520 mm (35.04" x 20.47")
Switch type	Thermomagnetic
Finish	Lead-free epoxy enamel very corrosion resistant
Waste tray	Yes
Movable blade guard	Yes
Sealed off bearings	Yes
Non slip silent V-belt drive	Yes
Net weight (Shipping)	173 Kg (211 Kg) 381.4 lbs. (465.18 lbs.)
Voltage	380/50/3



# robot coupe®



**440 W**   **500 W**   **750 W**   **850 W**   **1000 W**

MP 350 Ultra   MP 450 Ultra   MP 550 Ultra   MP 600 Ultra   MP 800 Turbo

**COMBI**

**440 W**   **500 W**   **500 W**

MP 350 Combi Ultra   MP 450 Combi Ultra   MP 450 FW Ultra


MP 350/MP 450: 9500 rpm  
MP 350 V.V./MP 450 V.V.: 1500 to 9000 rpm

9000 rpm   9500 rpm   9500 rpm

Mixer : 1500 to 9000 rpm  
Whisk : 250 to 1500 rpm

250 to 1500 rpm

LARGE RANGE	Electrical data				Dimensions (in mm)						Weight (kg)	
	Speed (rpm)		Power (Watts)	Voltage* (Amp.)	A	B	C	D	E	F	net	gross
	Mixer	Mixer Variable speed										
MP 350 Ultra	9500		440	230 V/50Hz 2.1	125	725	100	360			4.6	6.1
MP 350 V.V. Ultra		1500 to 9000	440	230 V/50Hz 2.1	125	725	100	360	440	120	4.8	6.3
MP 450 Ultra	9500		500	230 V/50Hz 2.3	125	825	100	460			4.9	6.4
MP 450 V.V. Ultra		1500 to 9000	500	230 V/50Hz 2.3	125	825	100	460	440	120	5.0	6.4
MP 550 Ultra	9000		750	230 V/50Hz 3.5	125	925	111	560			5.2	6.7
MP 600 Ultra	9500		850	230 V/50Hz 3.4	124	970	110	580			5.7	7.6
MP 800 Turbo	9500		1000	230 V/50Hz 4.5	125	1130	110	740			7.1	9

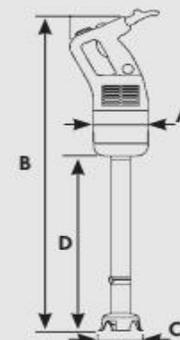





## Robot Coupe Vegetable Preparation Machine

- Model : CL50
- Dimensions : 375x343x595mm
- Output power : 1119Watt
- Electrical data : Single-phase - 12 Amp plug included
- Speed : 425rpm
- Net Weight : 19Kg

## Robot Coupe Vegetable Preparation Machine

- Model : CL52
- Dimensions : 360x340x690mm
- Output power : 750Watt
- Electrical data : 230V/1/50Hz
- Speed : 375rpm
- Net Weight : 22.5Kg

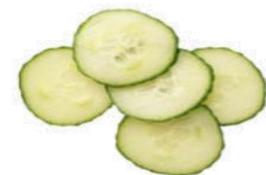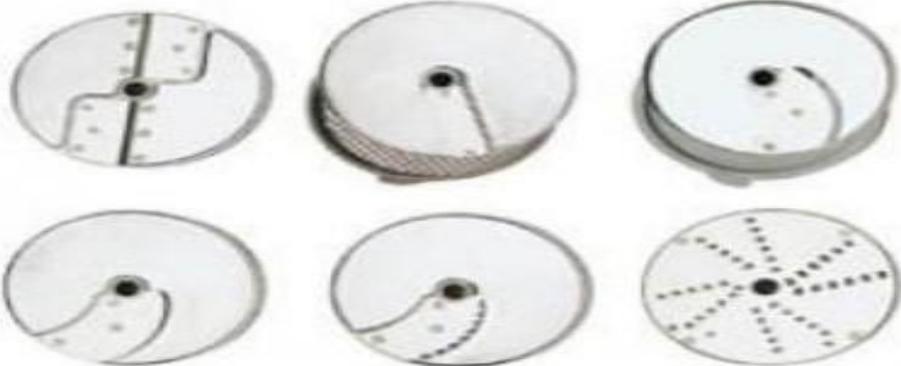



**Garlic slicer machine**

- Size : W340\*L205\*H300 (mm)
- Weight : 6.5kg
- Cutting size : selected in between 1~5mm
- Rated Speed : 136rpm
- Rated Output : 110~240V / 50~60Hz / 150W

**Scallion Slicer Machine**

- Size : W340\*L205\*H300 (mm)
- Weight : 6.5kg
- Cutting size : selected in between 1~5mm
- Rated Speed : 1,026rpm
- Rated Output : 110~240V / 50~60Hz / 150W




**Meat Tenderizer Machine**

- Size : W470\*L335\*H410 (mm)
- Weight : 22kg
- Rated Output : 110~240V / 50~60Hz / 400W



**신영 글로벌 (주)**  
**SHIN YOUNG GLOBAL CO.,LTD**



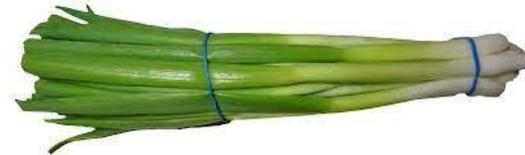

### Scallion Shredder Machine

- Size : W440\*L225\*H355 (mm)
- Weight : 15kg
- Cutting Size : Selected in between 2.3mm~9mm
- Rated speed : About 30 scallion/min
- Rated output : 110~240V, 50~60Hz, 300W



### Hot Pepper Slicer

- Size : W340\*L205\*H300 (mm)
- Weight : 6.5kg
- Cutting Size : selected in between 1~7mm
- Rated speed : 280 rpm
- Rated output : 110~240V / 50~60Hz / 150W



신영 글로벌 (주)  
SHIN YOUNG GLOBAL CO.,LTD



**Kit da incasso  
per ChocoHot One**  
Kit for building  
ChocoHot One in the counter  
14.1.INCASSO



**Kit da incasso  
per ChocoHot Two**  
Kit for building  
ChocoHot Two in the counter  
14.1.INCASSO2

# DIGITAL LINE



## Spray Mini digital 08.1.AMINI



110/220 V



2.7 kW



37 kg



47x34x43h cm



0.5-3.5 bar



max 85°C



600 cc/min

Aspirazione diretta dal contenitore del prodotto  
Suction direct from the gelatine containers  
Aspiración directa de los recipientes de la gelatina  
Aspiration directe à partir des récipients de gélatine  
Saugvorgang direkt aus den Gelatinebehältern



## Spray Mini digital con serbatoio 2,5 lt 08.1AMINIS




110/220 V



2.7 kW



35 kg



41x30x37h cm



0.5-3.5 bar



max 85°C



600 cc/min



MADE  
IN  
ITALY



	<b>Dosicream</b> 12.DOSI
	110/220 V
	0.18 kW
	27 kg
	45x30x33h cm 45x30x63h cm (8.5 L) 45x30x73h cm (13 L)



	<b>Dosicream-2</b> 12.DOSI2
	110/220 V
	0.36 kW
	41 kg
	53x43x30h cm 53x43x65h cm (8.5 L)



	<b>Dosicream-3</b> 12.DOSI3
	110/220 V
	0.54 kW
	69 kg
	76x43x30h cm 76x43x65h cm (8.5 L)

R O D R O C E S S O R S H R A

# DESSERT & SNACK



## Heat Soft Ice Cream Maker Machine

- Dimensions : 540x 730x 800H mm,
- Electrical data : 220v/ 50hz
- Output power : 2300w
- Weight : 96kg
- 16-22L/ h , Stainless Steel
- Refrigeration tank : 1.6L x 2
- Storage tank : 4.3L x 2
- Touch screen , Fast and easy to operate during peak hours.

Model:HCKX-100





# 6235-C/6235A-C

## SOFT SERVE FREEZER

Two Flavor, Countertop, Digital Control  
A: Pump Feed Model



**Powerful and Versatile**  
two flavor medium capacity  
countertop model for ice cream,  
frozen yogurt and much more

### Fast Freeze Down

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

### Digital Control and Display

Digital control provides access to system settings and displays critical system information

### Auto Programming

Allows automatic switching of operation modes based on preset schedules

### Stand by

Maintains product temperature in both mix hopper and freezing cylinder below  $-4.4^{\circ}\text{C}$  ( $40^{\circ}\text{F}$ ) overnight

### Hopper Agitator

Maintain product consistency and prevent product separation

.....  
Ideal for medium capacity outlets to serve ice cream, frozen yogurt, gelato or sorbet. Fully loaded with all standard options. Small footprint saves counter space.



### Soft System Start

Slow motor start reduces equipment noise and stress on drive train

### Direct Drive Transmission

Eliminates consumable moving parts and increases transmission efficiency

### Defrost for Cleaning

Increases efficiency during cleaning by heating frozen product in cylinder

### Quick Refreeze

Turn on freeze immediately to freeze down to serving viscosity when quick service is required after long idle period

### Self Closing Valve with Speed Control

Automatically prevents product overflow after dispensing. Provides flexibility in dispense rate control

### Safety Protections

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating



SPACEMAN ICE SYSTEMS (HK) CO., LIMITED

FACTORY: 16 GUANZHE RD, INDUSTRY PARK, DADI TOWN,  
HUZHOU, ZHEJIANG, CHINA 313023


PHONE: 435 572 3525 755 FAX: 435 572 3525 755

Email: [info@spacemanice.com](mailto:info@spacemanice.com)

[www.spacemanice.com](http://www.spacemanice.com)

# 6235-C / 6235A-C

## SOFT SERVE FREEZER

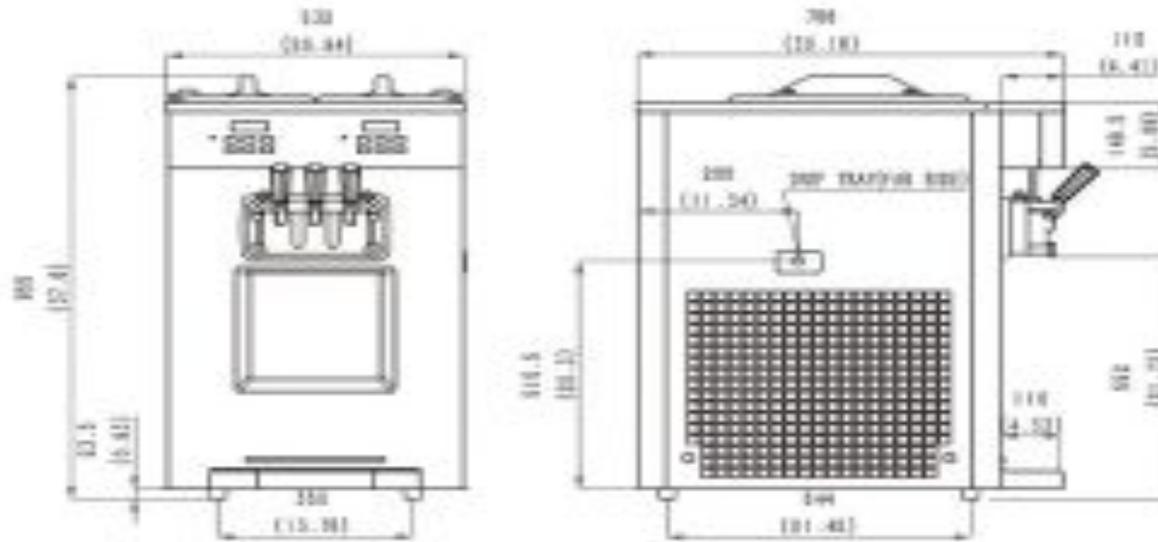

### SPECIFICATIONS

Flavors	2-4 Flav
Processing Cylinders	2 x 1.7L / 1.8qt
Mix Hoppers	2 x 12L (5L for A)
Output Capacity (30 grams)	450 serves/hr
Clearance Requirement	152mm/6" on left

Weight	Kg/lb (Gravity)	Kg/lb (Pump)
Net	195 / 413	195 / 435
Shipping	200 / 445	210 / 467
Volume	0.82CBM / 21.75CBF	

Dimensions	Net (mm/in)	Shipping (mm/in)
Width	330 / 13.0	390 / 15.4
Depth	765 / 30.1	950 / 37.4
Height	955 / 37.6	1070 / 42.1

Electrical	MFS	MCA	Power(kW)
220-240/50/1	30	20	3.0
208-230/60/1	30	22	3.0

### FEATURES

Control Systems	Two-Digital
Refrigerated Hoppers	✓
Hopper Agitator	✓
Temperature Display	✓
Standby Mode	✓
Auto Closing Dispensing Valves	✓
Dispensing Speed Control	✓
Low Mix Indicator Light & Alarm	✓
Low Temperature Protection	✓
Motor Overload Protection	✓
High Pressure Protection	✓
Defrost & Quick Refreeze	✓
Soft Start	✓
Direct Drive Pump (A only)	✓

### AVAILABLE OPTIONS

Water Cooled	✓
	✓
Cart (Trolley)	✓

- Above specifications are subject to change without notice



# 6220E

## SOFT SERVE FREEZER

Single flavor, Tabletop, Gravity feed



Most **Compact & Versatile** single flavor tabletop model that offers quality, capacity and simplicity

### Fast Freeze Down

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

### Overrun & Consistency Control

Simple and easy control of viscosity and overrun to ensure product consistency

### Low Mix Indicator

Light turns "ON" at low mix to alert operator to add mix

### Self Closing Dispensing Valve

Automatically prevents product overflow after dispensing

### Dispense Speed Control

Provides flexibility in dispensing rate control for different applications

.....

Ideal for any business with limited counter space to add ice cream, frozen yogurt, gelato or sorbet. Simple control makes it super easy to operate. Great fit for restaurants, bars, kitchens, convenience stores and delis.



### Hopper Refrigeration

Independent hopper cooling system consistently maintains product temperature below 4°C at all times

### Soft System Start

Slow motor start reduces equipment noise and stress on drive train

### Standby

Maintains product temperature in both mix hopper and freezing cylinder below 4°C overnight

### Safety Protections

- Low temperature and motor overload shut off to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating
- Thermal overload to protect from motor overheating




**SPACEMAN ICE SYSTEMS (HK) CO., LIMITED**  
 FACTORY: 1 GUANZE RD, INDUSTRY PARK, DAXI TOWN,  
 HUIZHOU, ZHEJIANG, CHINA 313023

PHONE: +86 572 3326755 FAX: +86 572 3326755  
 Email: [info@space.com.hk](mailto:info@space.com.hk) [space@space.com.hk](mailto:space@space.com.hk)  
[www.spaceman-company.com](http://www.spaceman-company.com)



# 6220E

## SOFT SERVE FREEZER

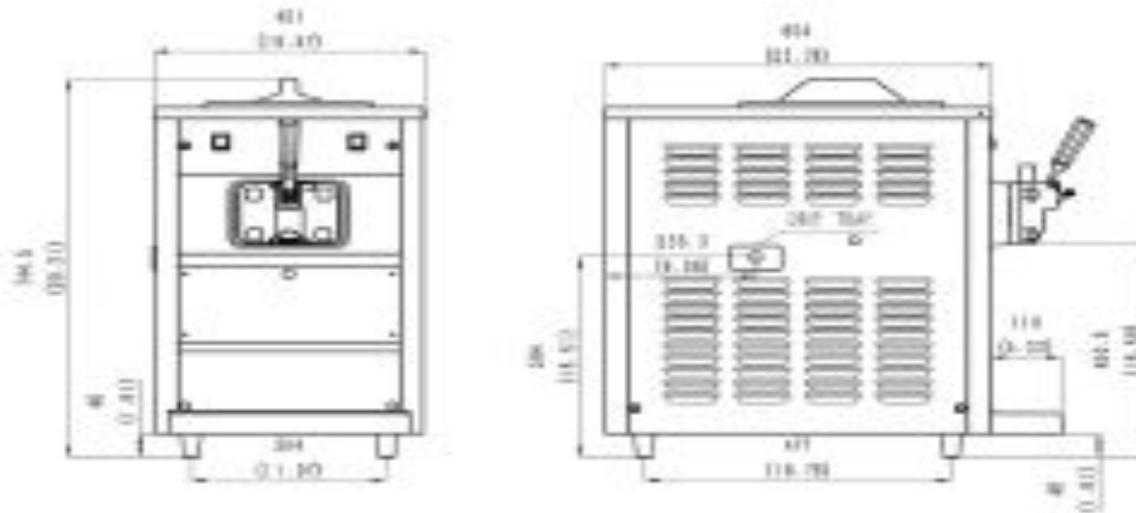

### SPECIFICATIONS

Flavors	1
Freezing Cylinders	1x 1.7L / 1.8qt
Mix Hoppers	1x 3.0L / 3.3qt
Output Capacity(30 grams)	200 scoops/hr
Clearance Requirements	152mm / 6" on right

### Weight Kg/lb (Gravity)

Net	92 / 20.3
Shipping	102 / 22.5
Volume	0.33C 59L / 11.47C 5F

### Dimensions Net (mm/lb) Shipping (mm/lb)

Width	421 / 16.5	450 / 17.7
Depth	304 / 11.98	304 / 11.98
Height	745 / 29.3	760 / 29.9

### Electrical MFS MCA Power(kW)

220-240/50/1	15	10	1.5
208-230/60/1	15	10	1.5

\* Above specifications are subject to change without notice

### FEATURES

Control System	Single, Analog
Refrigerated Hopper	✓
Standby Mode	✓
Auto Closing Discharge Valve	✓
Discharge Speed Control	✓
Low Mix Indicator Light	✓
Low Temperature Protection	✓
High Pressure Protection	✓
Thermal Overload Protection	✓
Invert or Soft Start	✓

### AVAILABLE OPTIONS

Water Cooled	✓
Cart (Trolley)	✓

# SHORT TERM LEASING

**SHORT-TERM**

**LEASING  
CONTRACTS FOR  
EQUIPMENT**



### Ice Cream Maker Machine

- Dimensions : 540x 730x 800H mm,
- Electrical data : 220v/ 50hz
- Output power : 2300w
- Weight : 96kg
- 16-22L/ h , Stainless Steel
- Refrigeration tank : 1.6L x 2
- Storage tank : 4.3L x 2
- Touch screen , Fast and easy to operate during peak hours.



#### Chocolate Flavor

This ice cream was rich, creamy, and packed with strong, chocolate notes. The intense flavor hit all the marks on the cocoa radar.



#### Vallina Flavor

This ice cream was soft, fluffy texture, high-quality taste. Overall, this ice cream was irresistible.



#### Yogurt Flavor

When comparing yogurt to ice cream, you have to throw in the health benefits here too because yogurt is technically healthier than ice cream.



## Digital Hood Type Dishwashers

- \*AISI 304 stainless steel body, digital control panel
- \*Instant display of tank and boiler water temperatures
- \*5 different washing programs, adjustable to 60-90-120-180-240 seconds
- \*1 dishwashing basket with 3 liters water consumption
- \*EPDM rubber hose assembly conforming to Food Codex standards
- \*Effective washing results with a specially-designed washing and rinsing arms structure
- \*Optional drain pump
- \*Optional rinse and detergent dosing pump
- \*Thanks to a specially-designed card technology, the rinsing process does not start before the boiler water temperature reaches 85°C. This guarantees hygienic rinsing according to HACCP standards
- \*The washing program can continue when the hood is open and closed
- \*9kW boiler heating element, 4.5kW tank heating element
- \*Front cover allows easy technical service without moving /dragging the product around
- \*Production of adjustable electrical circuit according to different voltages and number of phases



- \*Model: CRWD500TP
- \*Dimensions : 590x605x840mm / Basket Dimensions : 500x500mm
- \*Capacity : 30Basket / hour
- \*Weight : 61Kg
- \*Electical Connection : 230v/50Hz
- \*Total Power : 5.2Kw
- \*Tank Heating Element : 3.0Kw
- \*Boiler Heating Element : 4.5Kw
- \*Wash Pump Power : 0.65Kw
- \*Tank Capacity : 17Liters / Basket Plate Capacity : 18
- \*Boiler Capacity : 6.2Liters
- \*Washing Water Temp : 55C / Rinsing Water Temp : 85C
- \*Package Dimensions : 600x700x950mm



# PROJECT







*We are truly grateful to you for choosing us as your service provider and giving us the opportunity to grow.*

*None of our achievements would have been possible without you and your unwavering support !!!*

*Looking forward To serve you And Your Esteemed company*

Thank You • Terima Kasih • 谢谢 • 宥 j ń • ありがとう • 감사합니다 • Merci • Spasibo

**For more information on Heat Kitchen Equipment Products contact :**

Office : +603-92026512      Tel : +6017-357 9281 / +6010-656 9281

Email : [sale1@heatkitchenequipment.com](mailto:sale1@heatkitchenequipment.com) / [sales2@heatkitchenequipment.com](mailto:sales2@heatkitchenequipment.com)

Website : [www.heatkitchenequipment.com](http://www.heatkitchenequipment.com)



*Scan me*