Save up to 50% of your frying oil




Frying oil filter & oil tester

Your solution - the VITO product line

The world's most innovative frying oil filtration system!

The VITO oil filter system cleans your oil, ensures quality and saves up to 50%.











You will save money, oil, labor, storage space and delivery costs with VITO!



Easy & safe handling

Get clean oil in approx. 5 minutes. Put VITO in the fryer at service temperature. Push the button and vou're done!



Simple cleaning

VITO is made of stainless steel and therefore dishwasher safe! VITO disassembles to fit easily in any dishwasher!



Constant quality

VITO ensures you always fry in clean oil which means great quality fried food.






The VITO effect

What is VITO doing?

Used daily, VITO filters remove food particles and carbon from your frying oil. Frying in clean, filtered oil will result in a better tasting and better looking fried product. Oil life increases and workload decreases due to less oil changes and fryer cleanings.

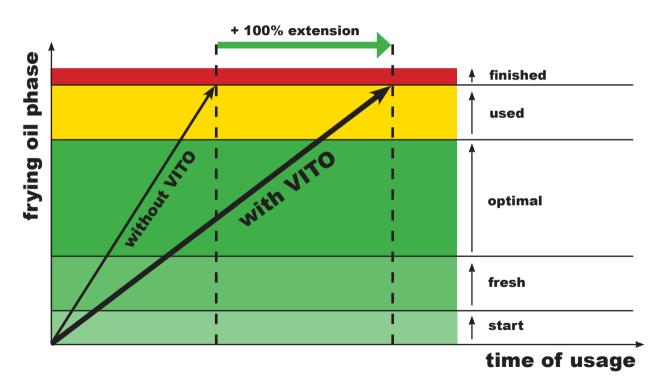


VITO portable

The world's best in-tank pressure oil filtration system!



Dimensions of the VITO shown









VITO 30 1-3 deep fryers up to 12 l. For light sediment



Track the usage of your VITO VL and VITO VM remotely and protect

VITOCOnnect

vour investment (Wi-Fi capable device necessary)

1-4 fryers up to 201 / 37lbs For light to medium sediment



All fryers or heavy duty. For medium to heavy sediment

	Filtration power	Filtration efficiency	Particle uptake	Work cycle	Suction depth	Weight	Temperature	Material VITO	Particle filter
VITO 30	up to 30I /min 66 lbs/min	up to 5ųm 200 ųinch	0,8kg 1.8lbs	4,5min	~ 20cm ~ 7.9in	6,3kg 14lbs	max. 200°C max. 392°F	Stainless steel 1.4301	Cellulose FDA-CFR 21
VITO VM	up to 60l/min 130 lbs/min	up to 5ųm 200 ųinch	1,3kg 2.9lbs	4,5min	~ 35cm ~ 13.8in	7,7kg 17lbs	max. 200°C max. 392°F	Stainless steel 1.4301	Cellulose FDA-CFR 21
VITO VL	up to 100l/min	up to 5ųm	2,5kg 5.5lbs	4,5min	~ 45cm ~ 17 7in	8,8kg 19.4lhs	max. 200°C	Stainless steel	Cellulose







VITO mobile

The world's most innovative vacuum filtration system!















Data reader Read out the usage of VITO

VITO XM


	Filtration power	Filtration efficiency	Particle uptake	Pumping power	Tank	Weight	Temperature	Material VITO	Particle filter
VITO XS	up to 30l /min	up to 5ųm	10,7kg /	35l/min	40I /	45kg /	max. 200°C	Stainless steel	Cellulose
	66 lbs/min	200 ųinch	23,6 lbs	77lbs	73lbs	100lbs	max. 392°F	1.4301	FDA-CFR 21
VITO XM	up to 30l/min	up to 5ųm	10,7kg /	35l/min	75I /	55,8kg /	max. 200°C	Stainless steel	Cellulose
	66 lbs/min	200 ųinch	23,6 lbs	77lbs	137lbs	123lbs	max. 392°F	1.4301	FDA-CFR 21
VITO XL	up to 30l/min	up to 5ųm	10,7kg /	35l/min	120l /	64kg /	max. 200°C	Stainless steel	Cellulose
	66 lbs/min	200 ųinch	23,6 lbs	77lbs	220lbs	141lbs	max. 392°F	1.4301	FDA-CFR 21

Frying oil testers

Measuring oil quality increases your savings!

Change oil as needed - never too early, never too late.



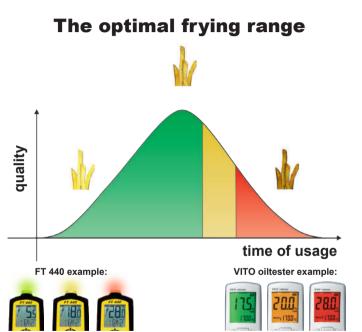



	Parameter	Resolution	Measuring range TPM	Measuring range °C / °F	Accuracy	Battery	IP format	Alarm function
FT 440	%TPM °C/°F	0.5% TPM 0.1°C/°F	0 40% TPM	+50°C +200°C +122°F +392°F	±2.0% TPM ±1°C / °F	3V Lithium (CR 2477)	IP 67	3-color traffic light function
VITO oiltester	%TPM °C/°F	0.5% TPM 0.1°C/°F	0 40% TPM	+40°C +200°C +104°F +392°F	±2.0% TPM ±1.5°C / °F	2x AAA	IP 65	3-color traffic light function



VITO

Seen in 150 countries - used in over 50.000 kitchens



















































































































The VITO - product line:

- saves up to 50% of your frying oil
- better quality for your fried products
- less workload around your fryer



























Manufacturer: VITO AG

Eltastr.6, 78532 Tuttlingen, Germany Phone: +49 (0) 7461 / 96289-0 Fax: +49 (0) 7461 / 96289-12 info@vito.ag - www.vito.ag

VITO® is a registered trademark of VITO AG, Germany V 5.4









